

LED FIXTURE

SSL Series

LED Outdoor Commercial Entry Light SSL-DW1

Enhanced LED performance in a classic design, offers maximum light output for general purpose area and security lighting, efficiently deliver lumens, and consume less energy than traditional wall mount technologies.



Lens Clear

Lens Frost



Features & Benefits

CUL listed, DLC

Available with lumen outputs from 1600 to 2700 lumens

LM-80 certified high performance and reliable lumileds LEDs

Die-cast aluminum with durable dark bronze body finish

Wet location rated

Junction box or wall mounted directly

CRI≥70*, L70 @ 50,000 Hrs

PC Lens clear or frost optional

* For details, see product specification below

Warranty

5-year limited warranty in commercial use from the date of purchase

Operating temperature range between -40°C and +40°C


Product Specification

Ordering Code	DLC	Model Number	Description	Wattage (W)	Input Voltage (V)	Hour Rating	Optics/ Distribution	Initial Delivered Lumens (lm)	CCT (K)	CRI	Dimension L×W×H(inch)	Case QTY.
3662105	Y	SSL-DW1/15W/50/120/F/DB	LED 15W, 50K, 120V, PC Lens Frost, Dark Bronze	15	120	50,000	H105° x V90°	1600	5000K	82	5.48 x 3.52 x 8.38	12
3663109	Y	SSL-DW1/17W/50/120/F/DB	LED 17W, 50K, 120V, PC Lens Frost, Dark Bronze	17	120	50,000	H90° x V110°	2000	5000K	70	5.48 x 3.52 x 8.38	12
3664102	Y	SSL-DW1/25W/50/120/F/DB	LED 25W, 50K, 120V, PC Lens Frost, Dark Bronze	25	120	50,000	H90° x V110°	2700	5000K	70	5.48 x 3.52 x 8.38	12
3663106	Y	SSL-DW1/17W/50/120/C/DB	LED 17W, 50K, 120V, PC Lens Clear, Dark Bronze	17	120	50,000	H90° x V70°	1700	5000K	82	5.48 x 3.52 x 8.38	12
3664103	Y	SSL-DW1/25W/50/120/C/DB	LED 25W, 50K, 120V, PC Lens Clear, Dark Bronze	25	120	50,000	H90° x V70°	2600	5000K	70	5.48 x 3.52 x 8.38	12

Applications

Security, entry ways, stairways, storage and perimeter areas, as well as residential exteriors

Dimensional drawing

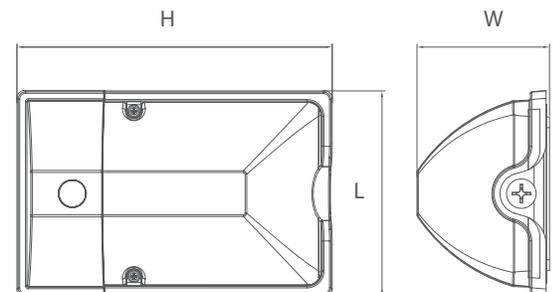

Ordering Information Example: SSL-WP2/30W/50/UNV/DB/PS1

Family Name	Fixture Type	Wattage	CCT	Voltage (V)	Lens	Body Finish
SSL (Solid State Lighting)	DW1 (Outdoor Commercial Entry Light)	25W 17W 15W	50 (5000K)	120 (120V)	F (Frost) C (Clear)	DB (Dark Bronze)