



## LED FIXTURE

### SSL Series



## LED Doorway Light SSL-DW2

Enhanced LED performance in a classic design, offers maximum light output for general purpose area, and security lighting.

Multiple Kelvin Selection



### Features & Benefits

cULus listed

Switchable CCT (30K/40K/50K)

120-277 Voltage, CRI $\geq$ 70

IP 65, Wet location rated

Die-cast aluminum, PC Lens

Dark bronze coat finish

L70 @ 50,000 Hrs

Photocell Sensor installed


Junction box mounted

### Warranty

5-year limited warranty in commercial use from the date of purchase

Operating temperature range between -40°C and +40°C

### Dimensional drawing

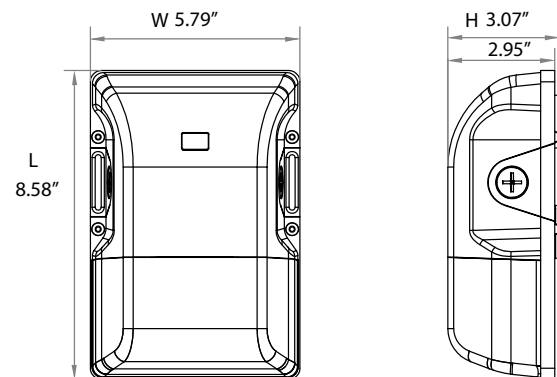

### Applications

Security, entryways, stairways, storage, and perimeter areas, as well as residential exteriors

### Ordering Information

 Example: SSL-DW2/15W/MK/UNV/PC/DB

Family Name	Fixture Type	Wattage	CCT (Kelvin)	Voltage	Lens	Finish
SSL (Solid State Lighting)	DW2 (LED Doorway Light)	15W 26W	MK (Multi CCT)	UNV (120-277V)	PC (Polycarbonate)	DB (Dark Bronze)

### Product Specification

Ordering Code	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Wet Location	Dimension LxWxH(inch)	Case QTY.
3662157	SSL-DW2/15W/MK/UNV/PC/DB	15	120-277V	50,000	1950	30-40-50	$\geq$ 70	Yes	8.58 X 5.79 X 3.07	10
3664152	SSL-DW2/26W/MK/UNV/PC/DB	26	120-277V	50,000	3225	30-40-50	$\geq$ 70	Yes	8.58 X 5.79 X 3.07	10