



LED FIXTURE

SSL Series



LED Mini Flood SSL-MFL

Enhanced LED performance in a classic design
Multiple Kelvin Selection



Kunckle Mount



Trunnion Mount



Features & Benefits

cULus listed

Switchable CCT (30K/40K/50K)

Optional installation of Kunckle and Trunnion Mount

IP 65, Wet location rated


120 Voltage, CRI \geq 70

Dark bronze coat finish


L70 @ 50,000 Hrs

Dimensional drawing

30W

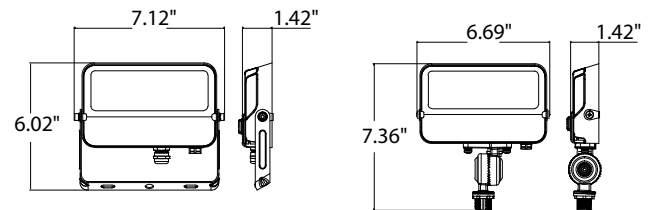

50W

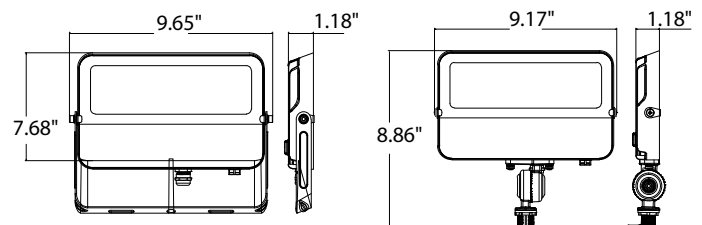

Warranty

5-year limited warranty in commercial use from the date of purchase

Operating temperature range between -40°C and +45°C

Applications

Building facades, displays, landscaping, security lighting, walkways and other work areas

Ordering Information

Example: SSL-MFL/30W/MK/120V/DB/KNC

Family Name	Fixture Type	Wattage	CCT (Kelvin)	Voltage	Finish	Mounting
SSL (Solid State Lighting)	MFL (LED Mini Flood)	30W 50W	MK (Multi CCT)	120V	DB (Dark Bronze)	KNC (Kunckle Mounting) TRU (Trunnion Mounting)

Product Specification

Ordering Code	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Wet Location	Case QTY.
3664153	SSL-MFL/30W/MK/120V/DB/KNC	30	120V	50,000	3150	30-40-50	\geq 70	Yes	24
3664154	SSL-MFL/30W/MK/120V/DB/TRU	30	120V	50,000	3150	30-40-50	\geq 70	Yes	24
3665170	SSL-MFL/50W/MK/120V/DB/KNC	50	120V	50,000	5250	30-40-50	\geq 70	Yes	16
3665171	SSL-MFL/50W/MK/120V/DB/TRU	50	120V	50,000	5250	30-40-50	\geq 70	Yes	16