



## LED FIXTURE

### SSL Series



## LED Glass Wall Pack SSL-WP1T

Enhanced LED performance in a classic design with glass lens  
120-347V Auto-Sensing Driver  
Multiple Wattage and Multiple Kelvin Selection



### Features & Benefits

cULus listed

120-347V Auto Sensing driver, 0-10V dimming

Switchable CCT (30K/40K/50K), Switchable Wattage

Die-cast aluminum with durable dark bronze coat finish

Wet location rated

Junction box or wall mounted directly

CRI≥80, L70 @ 50,000 Hrs


Photocell Sensor optional

### Warranty

5-year limited warranty in commercial use from the date of purchase

Operating temperature range between -40°C and +40°C

### Dimensional drawing

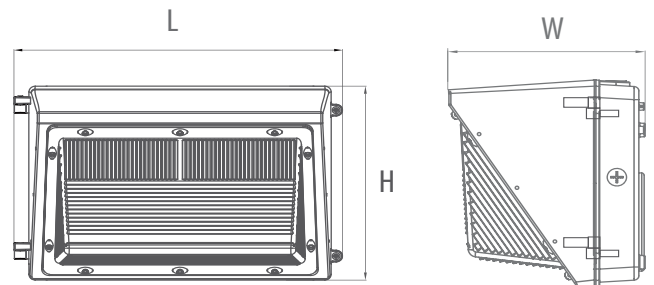

### Applications

Security, pathway and perimeter lighting, Building entryways and walkways

### Ordering Information

Example: SSL-WP1T/60M/MW/MK/120-347V/D/DB

| Family Name                   | Fixture Type                  | Size                                   | Wattage               | CCT (Kelvin)      | Voltage  | Dimmable     | Finish           | Options          |
|-------------------------------|-------------------------------|----------------------------------------|-----------------------|-------------------|----------|--------------|------------------|------------------|
| SSL<br>(Solid State Lighting) | WP1T<br>(LED Glass Wall Pack) | 60M<br>(Max 60w)<br>100L<br>(Max 100w) | MW<br>(Multi Wattage) | MK<br>(Multi CCT) | 120-347V | D (Dimmable) | DB (Dark Bronze) | Photocell Sensor |

### Product Specification

| Ordering Code | Model Number                      | Wattage (W)  | Input Voltage (V) | Hour Rating | Initial Delivered Lumens (lumen) | CCT (K)  | CRI | Wet Location | Dimension L×W×H(inch) | Case QTY. |
|---------------|-----------------------------------|--------------|-------------------|-------------|----------------------------------|----------|-----|--------------|-----------------------|-----------|
| 3680304       | SSL-WP1T/60M/MW/MK/120-347V/D/DB  | 60-40-28     | 120-347V          | 50,000      | 7200-4800-3360                   | 30-40-50 | ≥80 | Yes          | 14.3" x 9" x 7.8"     | 2         |
| 3680305       | SSL-WP1T/100L/MW/MK/120-347V/D/DB | 100-90-80-70 | 120-347V          | 50,000      | 12000-10800-9600-8400            | 30-40-50 | ≥80 | Yes          | 14.3" x 9" x 7.8"     | 2         |