

LED FIXTURE

TL Series



LED Emergency

TL-EM001

Twin Head LED Emergency Light



Features & Benefits

Injection-molded thermoplastic housing

Input Voltage 120/347V, 181 lumens

Easy installation

Ni-cd battery backup for 90 minutes

2W x 2 SMD LED adjustable heads


Universal (Wall, Ceiling) mounting

IP Class: IP20, not intended for outdoor use

Test switch and charge indicator light

UL-94V-0 flame rating, fire-retardant

Dimensional Drawing

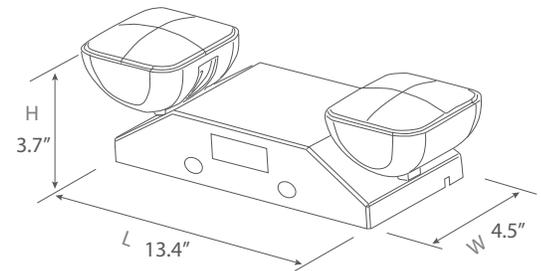

Warranty

2-year limited warranty in commercial use from the date of purchase

Operating temperature range between -10°C and +40°C

Ordering Information Example: TL-RMES003

Family Name	Fixture Type	Model
TL (Turolight)	EM (Emergency Light)	001 (Twin Head LED Emergency Light)

Product Specification

Ordering Code	Model Number	Description	Wattage (W)	Input Voltage (V)	CCT (K)	Hour Rating	CRI	Lumens	Mounting	Self Powered Battery	Damp Location	Dimensions LxWxH (inch)	Case QTY.
3461211	TL-EM001	Twin Head LED Emergency With Battery Backup	4W	120/347VAC	7,000	50,000	82	181	Wall, Ceiling	Yes (90 minutes)	Yes	13.4"×4.5"×3.7"	12