



LED FIXTURE

TL Series

LED Emergency With Battery

TL-EMRM/24W

LED Emergency Light With Battery Backup




Features & Benefits

| |
|--|
| Injection-molded thermoplastic ABS housing |
| Input Voltage 120/347V, 144 Lumens |
| Output 4W, 24W Remote Backup |
| 6V 5Ah Lead-acid Battery for 30 minutes |
| Remote capable 6V / 24W, support 12 pcs of TL-EM003 or 6 pcs of TL-EM002 |
| Universal (Wall, Ceiling) mounting |
| IP Class: IP20, not intended for outdoor use |
| Conversion time: <0.2second |
| Charging time 24 hours |

Warranty

| |
|---|
| 2-year limited warranty in commercial use from the date of purchase |
| Operating temperature range between 10°C and +40°C |

Dimensional Drawing

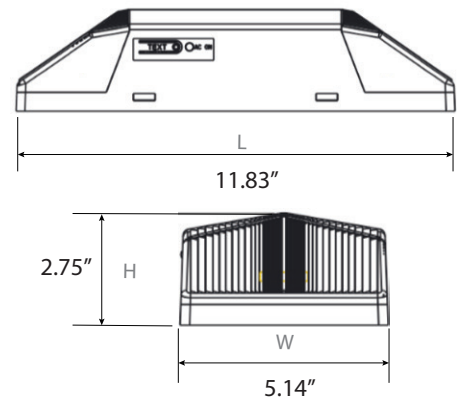

TL-EM003



TL-EM002

Ordering Information

Example: TL-EMRM/24W/6VDC/120-347V

| Family Name | Fixture Type | Model |
|----------------|-------------------------|-------------------|
| TL (Turolight) | EMRM (Emergency Remote) | 24W/6VDC/120-347V |

Product Specification

| Ordering Code | Model Number | Description | Wattage (W) | Input Voltage (V) | CCT (K) | Hour Rating | CRI | Lumens | Mounting | Self Powered Battery | Damp Location | Dimensions L×W×H (inch) | Case QTY. |
|---------------|---------------------------|--|----------------------|-------------------|---------|-------------|-----|--------|---------------|----------------------|---------------|-------------------------|-----------|
| 3464200 | TL-EMRM/24W/6VDC/120-347V | Twin Head LED Emergency With Battery Backup 24W Remote capable | 4W (24W For Remotes) | 120/347VAC | 7,000 | 50,000 | 82 | 144 | Wall, Ceiling | Yes (30 minutes) | Yes | 11.83"×5.14"×2.75" | 8 |