


10W LED Retrofit Lamp

Order Code: LP51412



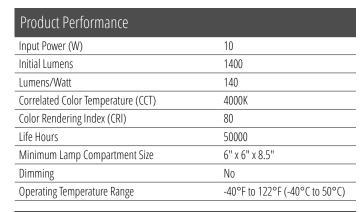

Physical Characteristics	
Base Type	Medium, (E26)
Overall Length A	5.63" (143mm)
Diameter B	2.32" (59mm)

Electrical Characteristics	
Input Voltage Range	100V-277V; 50/60Hz
Driver	Internal within lamp
Power Factor	>0.90
THD	<20%

Regu	latory	Qua	lificatio	ns

cULus Listed

Accessories

SP12714 - 120-277V Surge Protector



Description

Venture Lighting's LED Retrofit lamps are the ideal upgrade solution to traditional HID lamp technologies. Venture's LED Retrofit lamps are a simple energy saving solution for providing significant maintenance savings. The integrated driver design is an ideal upgrade from traditional technologies.

Features & Benefits

- Replaces MH or HPS up to 50W*
- Replaces CFL up to 32W*
- 5 year warranty
- Universal burn position
- Easy installation
- Reduced maintenance costs
- *Note: It is the customer's responsibility to verify that the lamp compartment meets the minimum required lamp compartment dimension of 6 " diameter by 8.5" long.

Applications

- Post top
- Wall pack
- Area Lighting
- Flood lighting
- · Garage lighting
- General illumination


Notes


- The use of an external surge protection device is recommended.
- Operating temp. range between -40°F and 122°F (-40°C and 50°C).
- Suitable for use in dry and damp environments.
- Suitable for use in portable, surface mounted and ceiling luminaires.
- Suitable for use in open and enclosed luminaires with minimum lamp compartment dimensions of 6 inch diameter x 8.5 inch deep.
- Do not use where exposed to water or outdoors without an appropriate enclosed luminaire.
- Lamps have clear polycarbonate cover lenses





Venture 10W LED Retrofit Lamp





provide voltage directly to lamp

(800) 451-2606 Fax: (800) 451-2605 7905 Cochran Rd, Suite 300 Glenwillow, Ohio 44139 $\hbox{E-mail: Venture_Lighting@VentureLighting.com}\\$ VentureLighting.com

