



Description

Venture's LED Wrap fixture is a lightweight LED light fixture, designed for long life and low maintenance. The fixtures are designed to quickly and easily upgrade existing fluorescent fixtures.

Construction

The enclosure is constructed from steel (finished with a durable white polyester power coating) and plastic end caps. Each fixture utilizes a specially engineered PPMA frosted optic which is designed to have low glare yet maximize the product performance.

Electrical

The power supply has a range of 120-277V, 50/60 HZ. 1-10V DC continuous dimming capability is standard.

Mounting

Suitable for surface mount or pendant mount applications.

Warranty

For warranty information refer to: venturelighting.com/resources/warranties

DLC® Model# SM2-40N8D4-04

Product Performance

Wattage	40W
Lumens	4640
Correlated Color Temperature (CCT)	4000K
Color Rendering Index (CRI)	≥80
Lumen Maintenance @50,000 hours*	90%
Calculated L70 @ 25°C Ambient in Hours*	161,000
Dimming	1-10V DC Continuous
Operating Temperature Range	-4°F to 122°F (-20°C to 50°C)

Physical Characteristics

Fixture Color	White
Length	47.6" (1210mm)
Width	5.3" (134.9mm)
Height	2.1" (54.4mm)
Weight	3.75 lbs (1.7kg)

Electrical Characteristics

Input Voltage	120-277V, 50/60 Hz, 0.32A max
Power Factor	≥90%
THD	≤20%

Regulatory Qualifications

UL Listed

DLC® Qualified

Damp Location Rated

Accessories

AC25420 3/8" 3-wire 14/3 600V MAX 6ft Flex Whip


WP – add suffix “-WP” to order code for a factory installed fixture with 6ft whip (AC25420)

Notes:


*Lumen maintenance data is based on LED testing per IESNA LM-80 and projected per IESNA TM-21



Venture 4ft LED Wrap Fixture

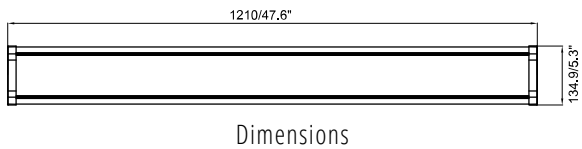

Luminous Intensity Distribution Diagram

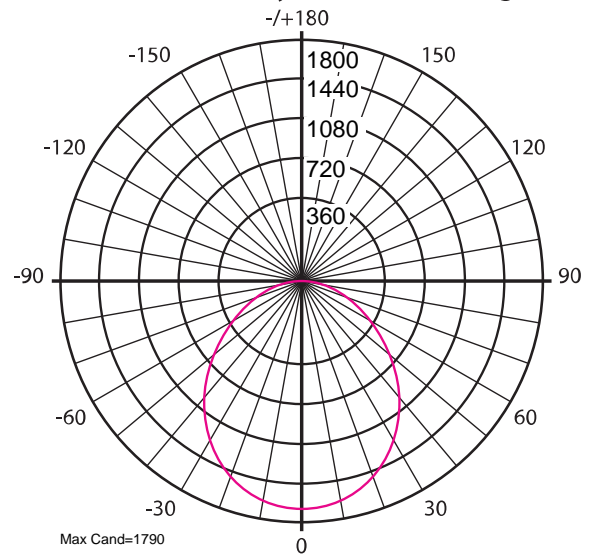

(800) 451-2606
Fax: (800) 451-2605
7905 Cochran Rd, Suite 300
Glenwillow, Ohio 44139
E-mail: Venture_Lighting@VentureLighting.com
VentureLighting.com

