


VFLOOD - 20W LED Flood Light

Order Code: FL59317



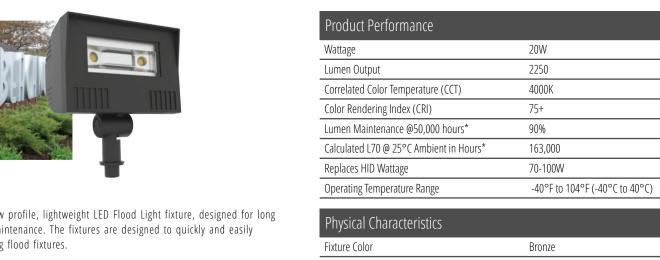

Physical Characteristics		
Fixture Color	Bronze	
Weight	3.8 lbs	
Width	6.69"	
Length	4.13"	
Height	4.72"	

Electrical Characteristics	
Amperage Draw (Input Volts/Amps)	120/0.20 208/0.12 240/0.10 277/0.09
Surge Protection	10kA

regulatory qualifications	
ETL Listed	
DLC Qualified - Model# FC4-20NA	
Rated for wet locations	

Accessories KT56256 U-BRKT ACCESSORY KIT 20W-50W ROUNDBACK FLOOD SP12714 – 120-277V Surge Protector

Description

VFLOOD is a low profile, lightweight LED Flood Light fixture, designed for long life and low maintenance. The fixtures are designed to quickly and easily upgrade existing flood fixtures.

Construction

The housing unit is constructed from heavy-duty, die cast aluminum. Fixtures are finished with a durable bronze polyester powder coating. To ensure weather-tight protection and to keep out contaminants, each optical assembly is sealed with a gasket. Each unit is rated for wet locations.

Electrical

The power supply has a range of 120-277V, 50/60 Hz. The high performance LED fixtures are rated up to 50,000 hours. These fixtures are not dimmable.

Mounting

Fixture come standard with w knuckle mount with a 1/2" NPS nipple. An accessory U-Bracket can also be purchased separately for yoke applications.

NOTE:


*Lumen maintenance data is based on LED testing per IESNA LM-80-08 and projected per IESNA TM-21-11









Venture VFLOOD - 20W LED Flood Light







(800) 451-2606 Fax: (800) 451-2605 2451 Enterprise Parkway East Twinsburg, Ohio 44087 USA E-mail: venture@adlt.com VentureLighting.com

