



VFLOOD - 80W LED Flood Light

Order Code: FL68933



Description

VFLOOD is a low profile, lightweight LED Flood Light fixture, designed for long life and low maintenance. The fixtures are designed to quickly and easily upgrade existing flood fixtures.

Construction

The housing unit is constructed from heavy-duty, die cast aluminum. Fixtures are finished with a durable bronze polyester powder coating. To ensure weather-tight protection and to keep out contaminants, each optical assembly is sealed with a gasket. Each unit is rated for wet locations.

Electrical

The power supply has a range of 120-277V, 50/60 Hz. Each 80W fixture is supplied with a 3-pin twist lock receptacle and shorting cap, as standard. The high performance LED fixtures are rated up to 50,000 hours. These fixtures are not dimmable.

Mounting

Fixture come standard with w knuckle mount with an adjustable slipfitter mount arm. An accessory U-Bracket can also be purchased separately for yoke applications.

DLC Model# FC3-80NA

Product Performance

Wattage	80W
Lumen Output	9300
Correlated Color Temperature (CCT)	4000K
Color Rendering Index (CRI)	70
Life Hours	50,000
Replaces HID Wattage	250W
Operating Temperature Range	-40°F to 104°F (-40°C to 40°C)

Physical Characteristics

Fixture Color	Bronze
Weight	13.8 lbs
Width	12.6"
Length	7.87"
Height	7.87"

Electrical Characteristics

Amperage Draw (Input Volts/Amps)	120/0.70 208/0.40 240/0.35 277/0.31
Surge Protection	10kA

Regulatory Qualifications

ETL Listed

DLC Qualified - Model# FC3-80NA

Rated for wet locations

Accessories

KT56338 U-BRKT ACCESSORY KIT 80W ROUND BACK FLOOD




PH12415 3-Pin Twist lock photocell (120-277V)

PH81975 Replacement shorting cap

SP12714 - 120-277V Surge Protector



Venture VFLOOD - 80W LED Flood Light

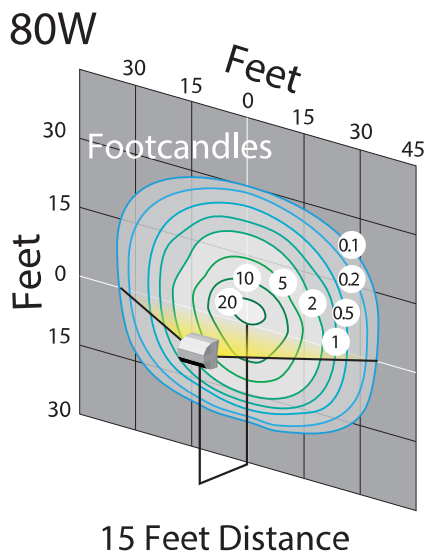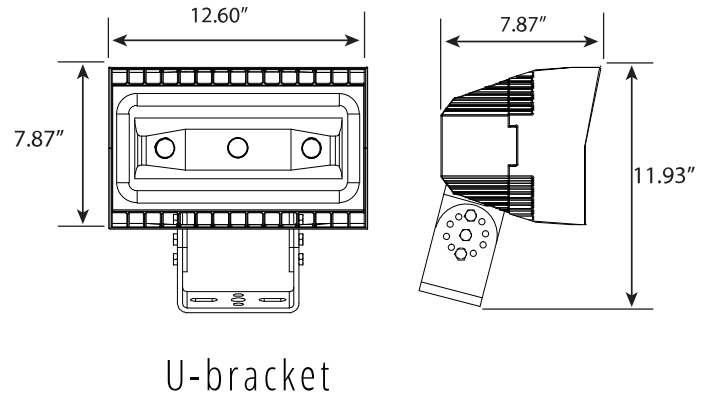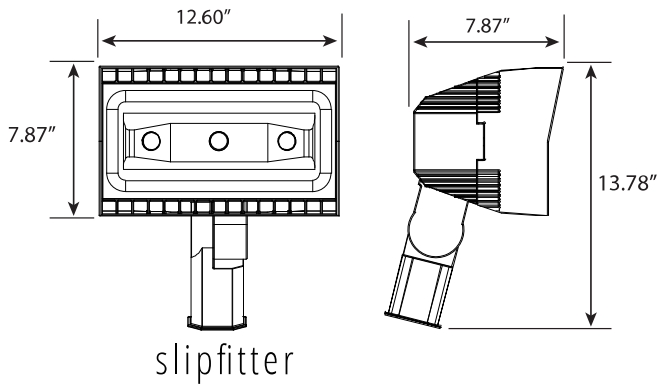

(800) 451-2606
Fax: (800) 451-2605
2451 Enterprise Parkway East
Twinsburg, Ohio 44087 USA
E-mail: venture@adlt.com
VentureLighting.com

