


150W VSplash LED Highbay Fixture

Order Code: HB45236





Description

Venture Lighting's VSplash LED highbay is NSF Certified and uniquely designed for food processing applications yet maintains a high lumen efficacy. They are designed to quickly and easily upgrade existing H.I.D and fluorescent fixtures.

Construction

The smooth shape eliminates exposed hardware as well as prevents dust and moisture from collecting, enhancing the safety for food processing applications. The die-cast aluminum body ensures heat dissipation providing cool running operation. The fixture is IP69K rated which ensures the fixture is dust tight and also able to withstand cleaning by high pressure water jets. The IP69K rating makes cleaning worry free for NSF applications. Fixtures have a durable and corrosion-resistant powder coat finish.

Ontics

The 150W units are equipped with a 90 degree beam polycarbonate lens for higher mounting heights and are also field adjustable with an accessory lens.

Electrical

The power supply has a range of 120-277V, 50/60 Hz. 0-10V DC dimming capability is standard. The luminaire is IP69K rated.

| Product Performance | |
|---|--------------------------------|
| Wattage | 150W |
| Lumen Output | 19820 |
| Correlated Color Temperature (CCT) | 5000K |
| Color Rendering Index (CRI) | 80 |
| Lumen Maintenance @50,000 hours* | 93% |
| Calculated L70 @ 25°C Ambient in Hours* | 230,000 |
| Replaces HID Wattage | 400W |
| Beam Angle (°) | 90 |
| Dimming | Yes |
| Operating Temperature Range | -40°F to 122°F (-40°C to 50°C) |

| Physical Characteristics | |
|--------------------------|----------|
| Diameter | 19.25" |
| Input Cable Length | 5ft. |
| Safety Cable Length | 3ft. |
| Fixture Color | Gray |
| Weight | 14.8 lbs |
| Height | 7.875" |

| Electrical Characteristics | |
|----------------------------------|-------------------------------------|
| Amperage Draw (Input Volts/Amps) | 120/1.30 208/0.73 240/0.65 277/0.56 |
| Surge Protection | 4kV |

| Reg | gulatory Qualifications |
|------|---------------------------------------|
| cULı | us Listed |
| DLC | Premium Qualified - Model# HW1-150C-A |
| NSF | Certified |
| IP69 | 9K Rated |
| | · |

Accessories

LN13632 - 120 Degree Polycarbonate Flat Lens for 100W to 300W Highbay

LN28431 - 50 Degree Polycarbonate Lens for 100W-200W Modern HB (except 200W High Temp.)

NOTE:

*Lumen maintenance data is based on LED testing per IESNA LM-80-08 and projected per IESNA TM-21-11















Venture 150W VSplash LED Highbay Fixture

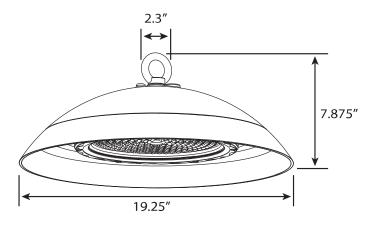



(800) 451-2606 Fax: (800) 451-2605 2451 Enterprise Parkway East Twinsburg, Ohio 44087 USA E-mail: venture@adlt.com VentureLighting.com

