



Description

Dusk to Dawn is a low profile, LED area lighting fixture, designed for long life and low maintenance. The fixtures are designed to quickly and easily upgrade existing area lighting fixtures. Twist lock photocell receptacle and 120-277V photocell included with the fixture.

Construction

The housing unit is constructed from heavy-duty, die cast aluminum. Fixtures are finished with a durable gray polyester powder coating. To ensure weather-tight protection and to keep out contaminants, each optical assembly is sealed with a silicone gasket. Each unit is rated for wet locations.

Electrical

The Class II power supply has a range of 120-277V, 50/60 Hz. The high performance LEDs are rated up to 50,000 hours. 0-10V dimming capability is standard.

Mounting

Fixtures can easily be installed in a wall mount application. Each fixture is supplied with an aluminum mounting arm with a 90° bend and all the associated hardware for pole mounting.

DLC Model# SL3-040CA

Product Performance

Wattage	40W
Lumen Output	4100
Lumens per Watt	103
Correlated Color Temperature (CCT)	5000K
Color Rendering Index (CRI)	74
Lumen Maintenance @50,000 hours*	96%
Calculated L70 @ 25°C Ambient in Hours*	380,000
Replaces HID Wattage	100W MH, 175W MV
Operating Temperature Range	-40°F to 104°F (-40°C to 40°C)

Physical Characteristics

Fixture Color	Gray
Weight	5.2 lbs
Width	9.5"
Length	13.375"
Height	9.5"

Electrical Characteristics

Amperage Draw (Input Volts/Amps)	120/0.35 208/0.20 240/0.18 277/0.16
Surge Protection	10kA

Regulatory Qualifications

cULus Listed
DLC Qualified - Model# SL3-040CA
Rated for wet locations

Accessories



Mounting kit is included with this product
SP12714 – 120-277V Surge Protector

NOTE:

*Lumen maintenance data is based on LED testing per IESNA LM-80-08 and projected per IESNA TM-21-11



Venture 40W Dusk to Dawn

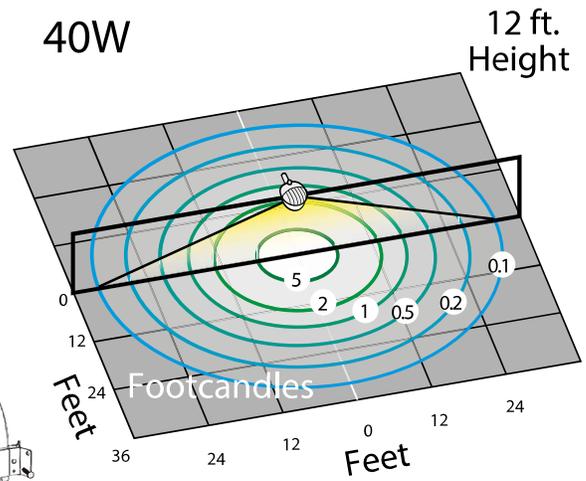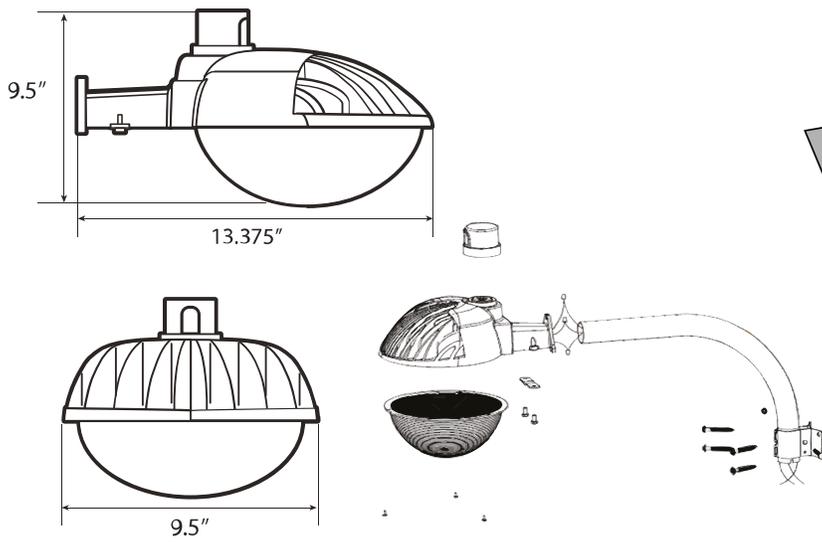

(800) 451-2606
Fax: (800) 451-2605
2451 Enterprise Parkway East
Twinsburg, Ohio 44087 USA
E-mail: venture@adlt.com
VentureLighting.com

