

DLC Model# SM2-65N8A-BF2



Description

The small size of Venture's LED Linear Strip makes it an ideal choice for size commercial, industrial, retail and residential applications. Fixtures can be used in storage/utility areas, coves, display cases, shops, task and general area lighting.

Construction

The fixture is powder coated for superior corrosion resistance. These versatile damp and dry rated fixtures are supplied with a low glare diffuse lens. Knock-out locations are available on each ends of the fixture as well as on top of the fixture for through-wiring.

Electrical

Fixtures are provided with 120-277V 50/60 Hz drivers with 0-10V DC dimming as a standard.

Mounting

Fixtures are for surface mounting applications. Can be pendant and suspended mounting as well. The lightweight design allows for easy installation/replacement of existing fixtures.

Product Performance

Wattage	65W
Lumen Output	7085
Correlated Color Temperature (CCT)	4000K
Color Rendering Index (CRI)	80
Lumen Maintenance @50,000 hours*	70%
Calculated L70 @ 25°C Ambient in Hours*	50,000
Operating Temperature Range	-4°F to 122°F (-20°C to 50°C)
Replaces Existing Fixture	150W T12 Fluorescent

Physical Characteristics

Fixture Color	White
Width	3.35"
Length	96.0"
Height	3.56"

Electrical Characteristics

Amperage Draw (Input Volts/Amps)	120/0.56 208/0.33 240/0.29 277/0.25
----------------------------------	-------------------------------------

Regulatory Qualifications

cULus Listed

Suitable for Dry and Damp Locations

DLC Model# SM2-65N8A-BF2

Accessories

PH41623 - Motion only control sensor



PH77409 - Motion/Photocell/Dim control sensor

NOTE:

*Lumen maintenance data is based on LED testing per IESNA LM-80-08 and projected per IESNA TM-21-11



Venture 8ft. LED Linear Strip

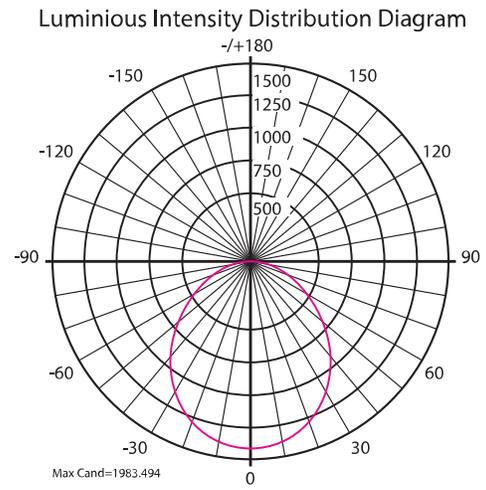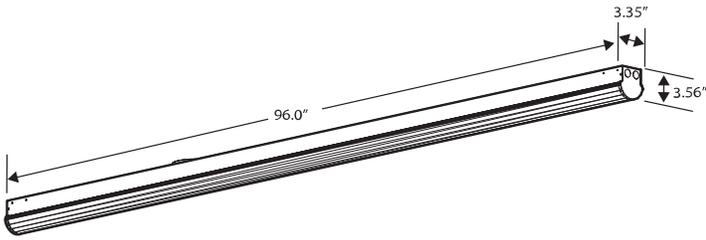

(800) 451-2606
Fax: (800) 451-2605
2451 Enterprise Parkway East
Twinsburg, Ohio 44087 USA
E-mail: venture@adlt.com
VentureLighting.com

