


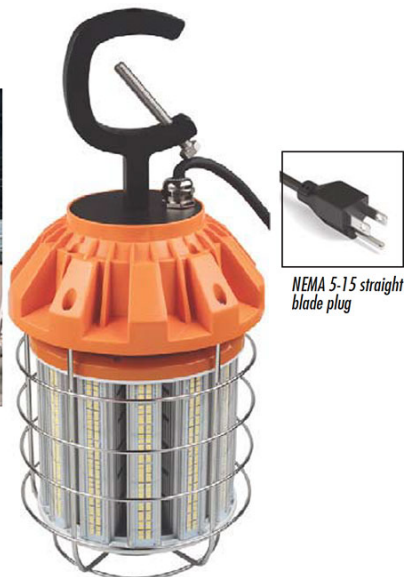

NEMA 5-15 straight blade plug

Description

Venture Lighting's temporary lighting luminaires are durable, light weight, and versatile mounting options allows for easy installation and movement. These LED luminaires are designed to be dependable and quickly and easily installed.

Applications

- Construction sites
- Warehouses, factories and workshops
- Highway toll stations and gas stations
- Exhibition halls

Construction

Each fixture is supplied with a protective cage around the fixture to protect the fixture from the harsh physical environment typical in temporary lighting applications. The LEDs are mounted to a custom extruded heat sink which allows for proper thermal management of the light sources.

Electrical

The power supply accepts 120V 60 Hz input. The luminaires are IP64 rated. Each fixture is supplied with a 9 foot long cable with a NEMA 5-15 straight blade plug.

Mounting

Each fixture is provided with a versatile C-clamp with locking screw which can be mounted in numerous field applications. The fixture can quickly and easily moved with in a job or from job site to job site.

DLC Model# ORT-100CCA1

Product Performance

Input Power (W)	100
Bare Lamp Lumens	12580
Lumens/Watt (Bare Lamp)	126
Correlated Color Temperature (CCT)	5000K
Color Rendering Index (CRI)	80
Life Hours	50000
Beam Angle (°)	360°
Dimming	No
Operating Temperature Range	-40°F to 104°F (-40°C to 40°C)

Physical Characteristics

Overall Length A	14.52" (369 mm)
Diameter B	6.7" (170 mm)
Weight	3.0 lbs (1.36 kg)

Electrical Characteristics

Input Voltage	120V 60Hz
Driver	Internal within lamp
Power Factor	>0.90
THD	<20%
Included Installed Plug	NEMA 5-15 Straight Blade


Regulatory Qualifications

cULus Listed


DLC Model # ORT-100CCA1



Venture 100W LED Temporary Work Lighting

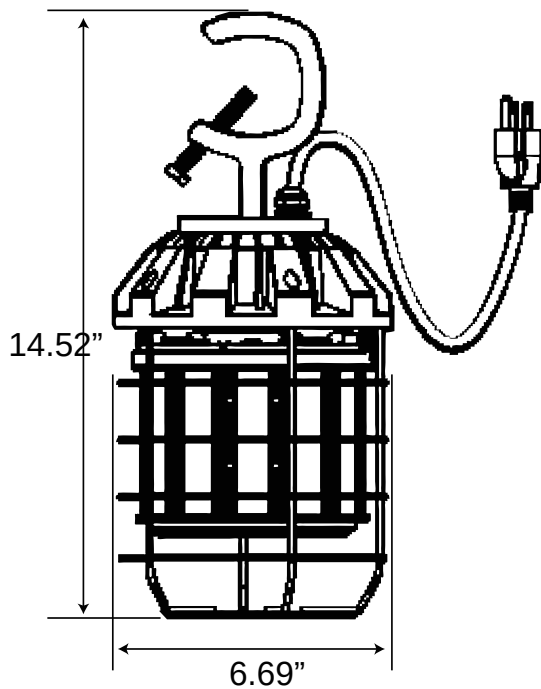

C-clamp
with locking screw

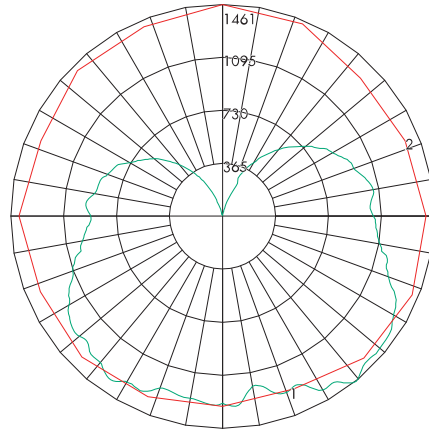

(800) 451-2606
Fax: (800) 451-2605
2451 Enterprise Parkway East
Twinsburg, Ohio 44087 USA
E-mail: venture@adlt.com
VentureLighting.com

