


## VWallpax - 50W LED Wallpack

Order Code: WP44708





Length

Height

Accessories

Electrical Characteristics	
Amperage Draw (Input Volts/Amps)	120/0.42 208/0.27 240/0.23 277/0.21
Surge Protection	10kA

11.81"

10.24"

negulatory Qualifications
cETLus Listed
DLC Qualified - Model# WPD-50NA
Rated for wet locations

PH56903 Button Photocell (120-277V)
KT24989 Slipfitter Mount Conversion Kit — Bronze color
SP12714 – 120-277V Surge Protector

## Description

designed for long life with low maintenance and great performance. These LED luminaires are designed to quickly and easily upgrade existing wall pack fixtures.

### Construction

Rugged die cast housing finished in a durable powder coat finish and with glass lens. The high performance LED sources are mounted to ensure proper thermal management of the system. The design allows for a cooler running LED chip which leads to longer lifetime, better efficacy, and color consistency and sealed to eliminate the threat of contaminants damaging the components. The standard fixture color is bronze, custom colors available upon request.

#### Electrical

The power supply has a range of 120-277V, 50/60 Hz. The luminaires are rated for wet locations. Button photocell accessory can easily be mounted into the fixture. These fixtures are not dimmable.

#### Mounting

Each fixture is easily installed to a standard recessed junction box. Slipfitter conversion kit can be used for flood lighting applications.


\*Lumen maintenance data is based on LED testing per IESNA LM-80-08 and projected per IESNA TM-21-11








# Venture VWallpax - 50W LED Wallpack

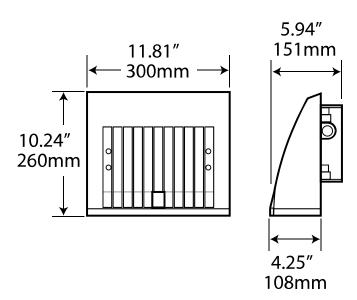



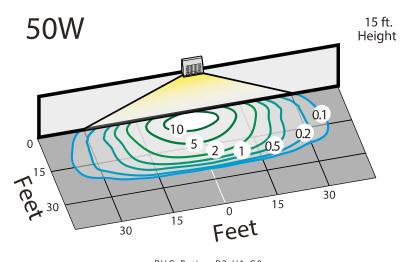

BUG Rating B2-U1-G0

(800) 451-2606 Fax: (800) 451-2605 2451 Enterprise Parkway East Twinsburg, Ohio 44087 USA E-mail: venture@adlt.com VentureLighting.com

