

4" Multi-Directional Gimbal



Features

- IC Rated
- Airtight
- Dimmable
- 3CCTs 3000K, 4000K, 5000K selectable
- Work with most of existing dimmer in market
- Five years limited warranty
- Not for emergency lighting
- Suitable for damp locations





360° Rotation



90° Tilt

Model No.	DL4-023-8WH8345	DL4-023-8BK8345	DL4-023-8BN8345
Dimension	Φ4.7" x 1.1"	Φ4.7" x 1.1"	Φ4.7" x 1.1"
Fixture Color	White	Black	Brushed nickel
Watts	8W	8W	8W
Volts	120V	120V	120V
CRI	80	80	80
Color Temperature	3000K, 4000K, 5000K Selectable	3000K, 4000K, 5000K Selectable	3000K, 4000K, 5000K Selectable
Initial Lumens	700	700	700
Beam angle	40°	40°	40°
Operating Temperature	(-4°F) — (104°F)	(-4°F) — (104°F)	(-4°F) — (104°F)
Average Rated Life	50,000H	50,000H	50,000H
Weight(g)	440	440	440
Warranty	5 years	5 years	5 years



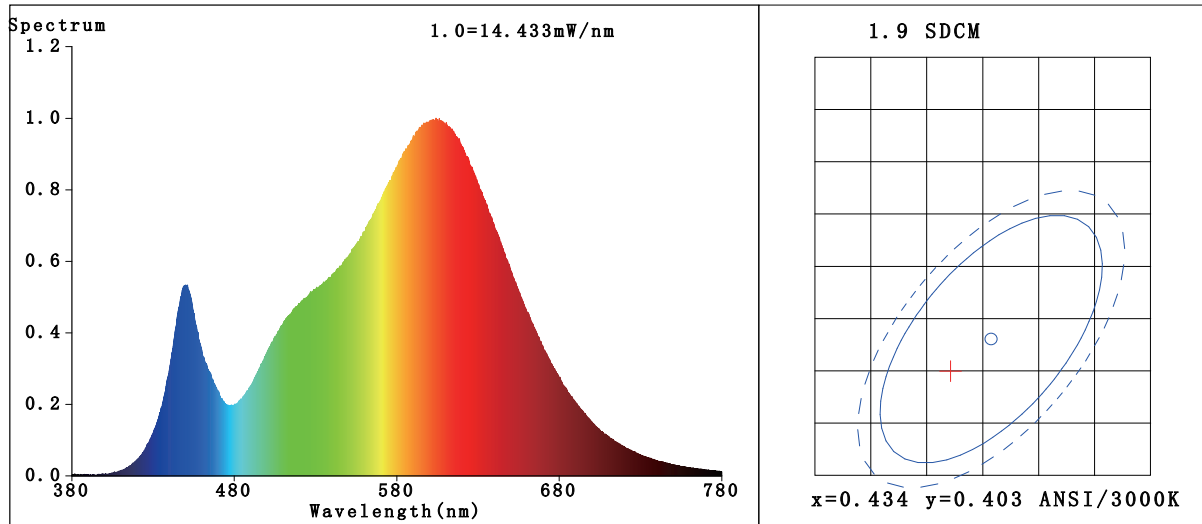

AAI Figure

LUMINOIS INTENSITY DISTRIBUTION DIAGRAM

