



## Technical Specifications


Model No.:		HLG-8W
OPTICAL	Input power	40W/60W/80W Adjustable
	Lumen	4000LM/6000LM/8000LM
	Lumen Efficiency	100LM/W
	CCT	2700K/3000K/3500K/4000K/5000K Adjustable
	CRI	> 80
ELECTRICAL	Input Voltage	120V
	PF	> 0.9
	THD	< %20
MAERIALS	LED Brand	Bridgelux
	LED Type	SMD2835
	Housing	Aluminium + Plastic
	Housing Color	White
	Cover	Flat Lens
	Waterproof Rating	Dry Location
	IK Rating	IK 10
OTHERS	Operating Temperature	-30°C To 45°C
	Operating Humidity	%10-%90 RH
	Storage Temperature	-40°C To 85°C
	Storage Humidity	%10-%95 RH
	Warranty Time	5 years

## LED Garage Light

### Advantage


- Adjustable 4 panles
- Very bright and efficient. More that 100lm/W
- Watt adjustable: 40-60-80W
- CCT adjustable: 2700K-3000K-3500K-4000K-5000K
- E26 Base
- UL cUL certificate.
- No UV or IR in the beam.
- Easy to install and operate.
- Energy saving, Long lifespan.
- Light is soft and uniform, Safe to eyes.
- Instant start, NO flickering, NO humming.
- Green and eco-friendly without mercury.

### Dimensions

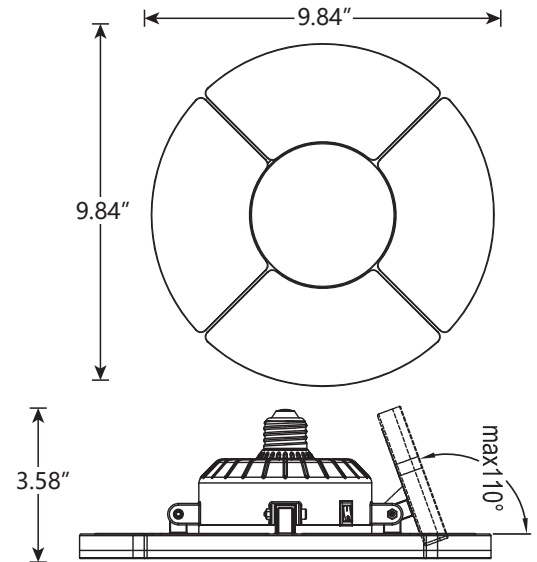


### Light Distribution Testing Parameters

#### 40W

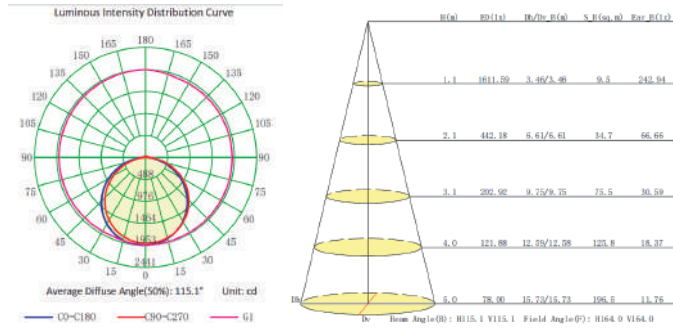

#### 60W

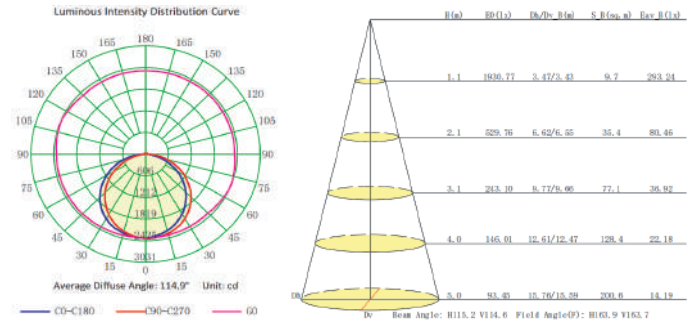

#### 80W

