CCT Adjustable

www.votatec.ca



Specifications:

Model	HM08-PR16-30W120-3CCT-WSA/WH	HM08-PR24-48W120-5CCT-WSA/WH
	HM08-PR16-30W120-3CCT-BSA/BK	HM08-PR24-48W120-5CCT-BSA/BK
Dimension	16"x0.9"	24"x0.9"
Power	30W	48W
ССТ	3000K / 4000K / 5000K	2700K/ 3000K /3500K/ 4000K / 5000K
Brightness	2400LM	3840LM
LED Type	SMD2835 / 224PCS	SMD2835 / 320PCS
Voltage	120V	
Power Efficiency	≥0.9	
RA	≥80	
Beam Angle	110°	

Features:


- Built-in driver, 24mm thickness
- White & Black two different colors available
- Good Quality LGP & diffuser Plate
- Stable design for the whole structure
- SMT technology, ensuring accurate for LEDs on FPCB
- 3 CCT tunable
- 120V, Triac dimming
- 5 Years warranty











www.votatec.ca

CCT Adjustable

Perfect LED Mounting

Uniform Light Distribution

The LED Light Strip


SMT technology, ensuring accurate positions for LEDs on FPCB Good quality LGP and diffuser plate Stable design for the whole structure


Above ensures uniform lighting, no black dots and shadow.





Surface Mounted With J-Box

Light Distribution













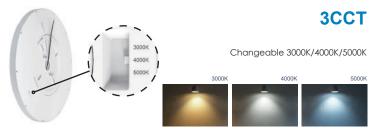

Dimensions:



0.9" 82 82 82 48W LED panel

HM08-PR16-30W-3CCT

HM08-PR24-48W-5CCT

