



Innovation & Quality

www.votatec.ca

4ft Glass T8 Tube With Plastic Coating (UL TYPE B)

PV-4FT-15WB7N-50K






Item Number	Type	Wattage (W)	Length (ft)	CCT (Kelvin)	Luminous flux (lm)	CRI (Ra)	Beam Angle (Degree)	Input Voltage	Dimming
PV-4FT-15WB7N-50K	B	15W	4	5000K	5500 lm	> 83	200°	120-347V	YES


Electrical and Photometric Characteristics

							
Base Type G13	Nominal Voltage 120V-347V	IP Rating IP20	Power Factor >0.9	CRI >83	Starting Time <1.0 s	Lumen Maintenance 50,000Hours	Operating Temp. -20°C ~ +45°C

Luminous Intensity Distribution Diagram

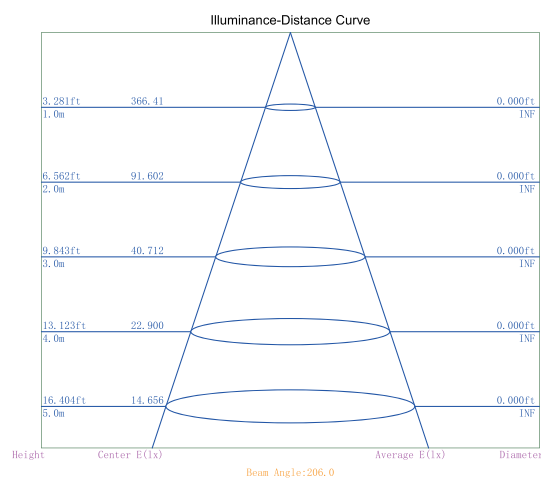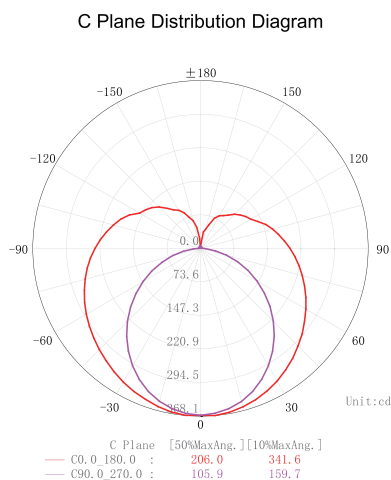

Dimension Diagram

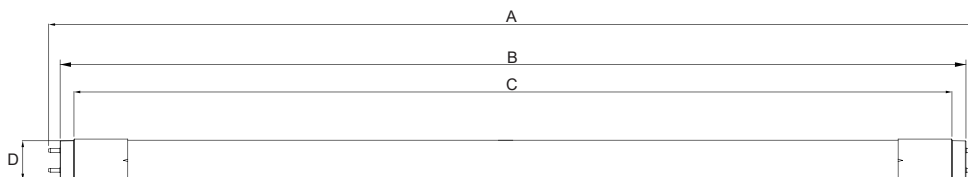

A: 47.72" (1212.0mm) B: 47.17" (1198.0mm) C: 46.5" (1181.0mm) D: 1" (25.4mm)

Wiring Diagram



Double Ended Input (Type B)

Single Ended Input (Type B)

Voltage Input: AC120-347V 50/60Hz

