

FA8
(NOT Included)



R17D
(Included)





Item Number	Type	Wattage (W)	Length (ft)	CCT (Kelvin)	Luminous flux (lm)	CRI (Ra)	Beam Angle (Degree)	Input Voltage	Dimming
PV-8FT-42WABOFL-50K	A+B	42W	8	5000K	5500 lm	> 83	> 220°	120-277V	YES

Double End Power Input & Single End Power Input

Electrical and Photometric Characteristics

Base Type G13	Nominal Voltage 120V-277V	IP Rating IP20	Power Factor >0.9	CRI >83	Starting Time <1.0 s	Lumen Maintenance 50,000Hours	Operating Temp. -20°C ~ +45°C


Luminous Intensity Distribution Diagram

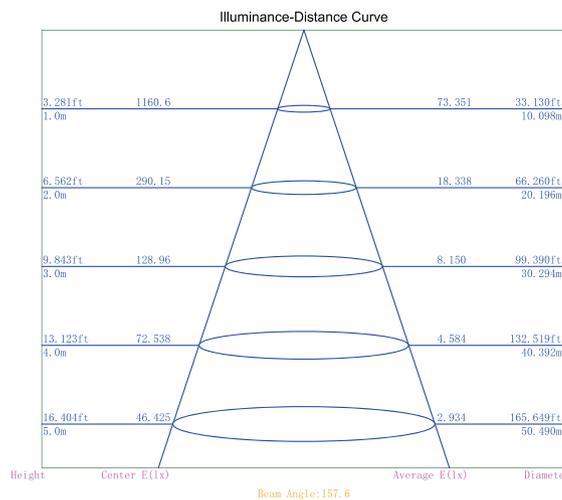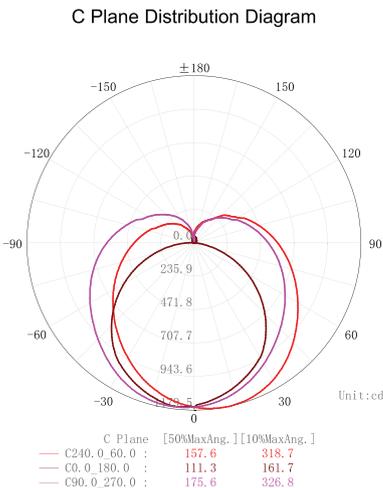

5000 K	G13	50,000 H	220° BEAMANGLE



Dimension Diagram

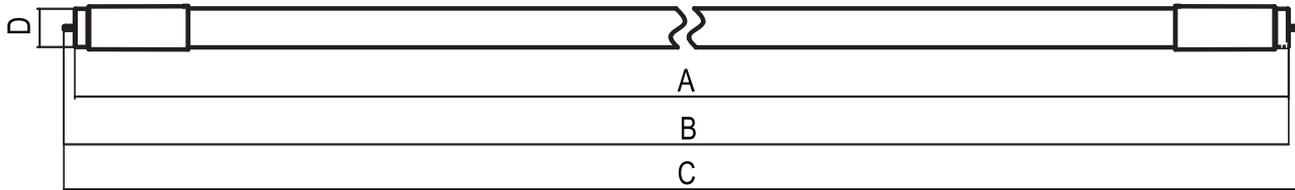

A(max):2349.9mm (92.5")
 B(max):2357.1mm (92.8")
 B(min):2352.3mm (92.6")
 C(max):2364.3mm (93.1")
 D(max):25mm (1.0")

Ballast Compatible

Brand	Model
GE	GE259MAX-G-N
GE	GE259MAX-G-N-DIYB
OSRAM SYLVANIA	QHE 2X59T8/UNV ISL-SC
OSRAM SYLVANIA	QTP 2X59T8/UNV ISN-SC



FA8
 (NOT Included)
 Sells Separatly



R17D
 (Included)



Anti-Rotation Clip
 (Included)

