www.votatec.ca

3CCT Adjustable



Specification	
Model	SF18CR15C25W
Power	25W
Luminous Flux	2250-2500lm
Power Supply	120V 50/60 Hz
C.C.T	3CCT(3000K/4000K/5000K)
Ra	>80
PF	>0.9
Beam Angle	100°
Sensor	Pyroelectric Infrared Sensor(PIR)
Sensing Degree	180°
Sensing Distance	21m
"On" Duration time	5S-5MIN
Installation Method	Wire Connection
Operation mode	PIR sensor
Life	50000hours
Waterproof Rating	Wet location/IP65
Lamp Body Material	PC+Aluminum
Lamp Cover	Clear PC
Color	White
Certificate	ETL














www.votatec.ca

3CCT Adjustable

Dimensions:

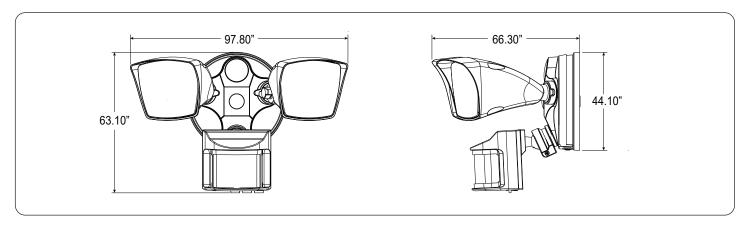

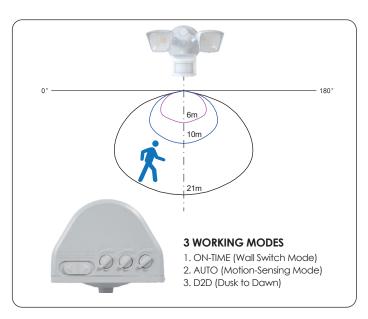

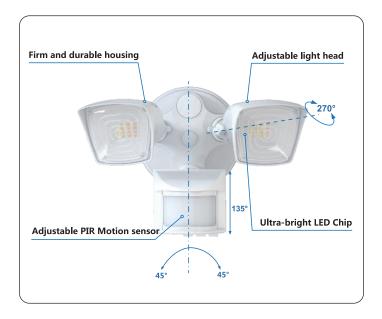



This product must be installed in accordance with applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.





