

LED BACKLIT PANEL



Specification:


| Model No.: | Size | Wattage (W) | Efficacy (lm/W) | Color Temp (K) | CRI | Dim solution | Voltage |
|------------------------|--------|-------------|-----------------|---|-------|--------------|----------|
| VO-22W40-120-3Way-B-PX | 2x2 ft | 40-30-25W | 125 | 3500K- 4000K- 5000K changeable | Ra>80 | 1-10V | 120-277V |
| VO-14W40-120-3Way-B-PX | 1x4 ft | 40-30-25W | | | | | |
| VO-24W50-120-3Way-B-PX | 2x4 ft | 50-40-30W | | | | | |

For Model No.

"3Way" represent the selectable power 40W/30W/25W(2x2, 1x4) , 50W/40W/30W(2x4) and selectable CCT is 5000K/4000K/3500K

Features:

- No LGP , never yellowing.
- High efficacy up to 125 lm/w, meet DLC standard and premium version.
- Series: Color & Wattage tunable.
- 5 Years warranty
- 50% energy saving, high brightness and even light
- Fast start, no flickering and noise
- The latest high efficiency constant current driver, ana-wave interference
- Lead-free, green environmental protecton, meet ROHS requirements



Applications:

- Power Factor: >0.9
- CRI:>80
- Warranty : 5 years




PMMA LENS



SDCM≤ 0



UGR<math>< 22</math>




Flicker free




Thicker cooper foil


Dimensions:



602*602mm

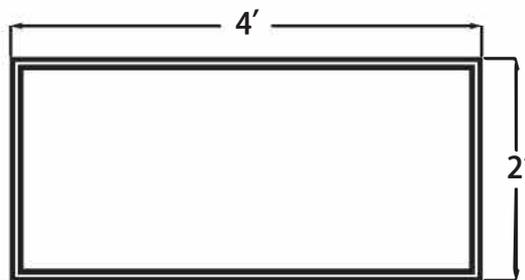

602*1209mm

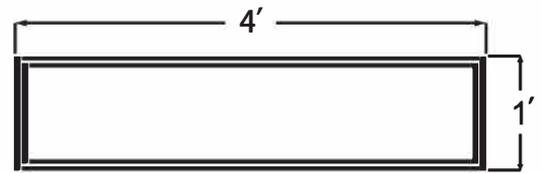

298*1209mm

Installation Accessories:



- Spring Clip



- Suspended Kit



- Surface Mounted Frame