


LED EDGE-LIT PANEL

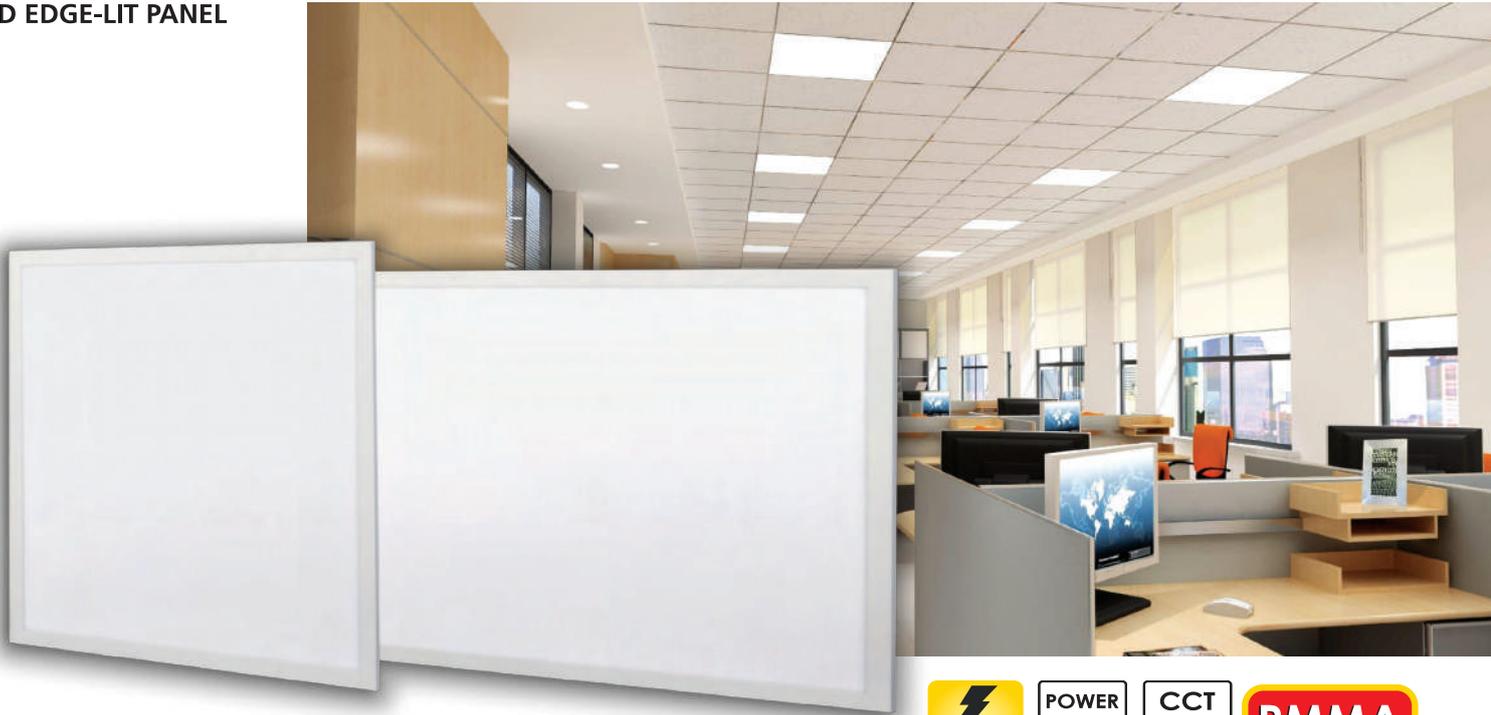

Specification:

Model No.:	Size	Wattage (W)	Efficacy (lm/W)	Color Temp (K)	CRI	Dim solution	Voltage
VO-22W40-120-3Way-E-SX	2x2 ft	40-30-25W	110	3500K 4000K 5000K changeable	Ra>80	1-10V	120-277V
VO-14W40-120-3Way-E-SX	1x4 ft	40-30-25W					
VO-24W50-120-3Way-E-SX	2x4 ft	50-40-30W					
VO-22W40-120-XX-E-SX	2x2 ft	40W	110	4000K- 5000K	Ra>80	1-10V	120-347V
VO-14W40-120-XX-E-SX	1x4 ft	40W					
VO-24W50-120-XX-E-SX	2x4 ft	50W					
VO-22W40-347-3Way-E-SX	2x2 ft	40-30-25W	110	3500K 4000K 5000K changeable	Ra>80	1-10V	120-347V
VO-14W40-347-3Way-E-SX	1x4 ft	40-30-25W					
VO-24W50-347-3Way-E-SX	2x4 ft	50-40-30W					
VO-22W40-347-XX-E-SX	2x2 ft	40W	110	4000K- 5000K	Ra>80	1-10V	120-347V
VO-14W40-347-XX-E-SX	1x4 ft	40W					
VO-24W50-347-XX-E-SX	2x4 ft	50W					


For Model No.

“3Way” represent the selectable power 40W/30W/25W (2x2,1x4), 50W /40W/30W (2x4) and selectable CCT is 5000K/4000K/3500K

XX Represents 40 as 4000K and 50 as 5000K

Features:

- Seamless flat frame—double-sides Robot welding technology, no light leaks at the corners.
- Ultra thin. 39” Aluminum frame fits standard dropped ceilings
- High-brightness SMD chip with 50,000 hr. lifespan
- 0-10V Dimmable and Flicker Free Driver
- Tool-free Mounting options
- Standard Dropped Ceiling
- Drywall hanging kit for drywall
- T-grid/Junction box for T-grid and hard ceilings
- Surface mounting kit
- Onboard driver included

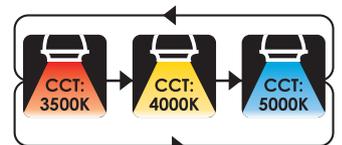

Applications:

- Power Factor: >0.9
- CRI:>80
- Warranty : 5 years


Strong Back Plate




2 sides edge-lit



LEDs protection




Flicker free



PMMA LGP




Packaged with gold wire




Thicker copper foil


Dimensions:

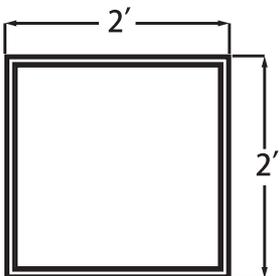

602*602mm

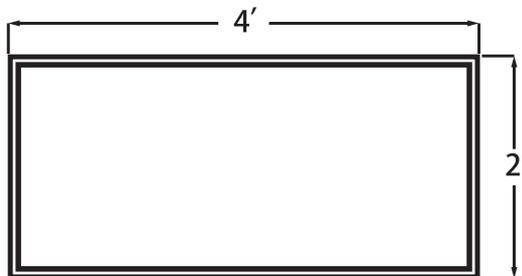

602*1209mm

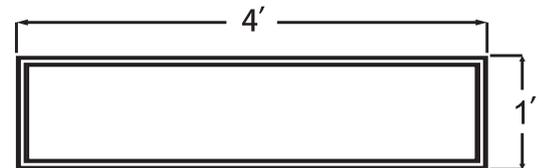

298*1209mm

Installation Accessories:



- Spring Clip



- Suspended Kit



- Surface Mounted Frame