



### Product Features

The Votatec Linear High Bay is the lighting solution for a wide variety of applications and mounting heights. Precision-designed optics, multiple distributions, and a choice of lumen outputs and color temperatures make the energy-Efficient of the Linear High Bay ideal solution for industrial, commercial and other high bay application.


### Linear High Bay ( Dimmable)

Specification									
Model No.:	Size	Watt	Efficiency	Dimming	Lens	Voltage	Color Temperature	Installation	
VO-LH2W155FT2-347-50-D	2FT	155W	21000Lm	0-10V	Frosted Lens	120-347V	4000K or 5000K	V Hook+Chain Surface Pendant	
VO-LH2W170FT4-347-50-D	4FT	170W	22950Lm	0-10V	Frosted Lens	120-347V	4000K or 5000K		
VO-LH2W255FT4-347-50-D	4FT	255W	34425Lm	0-10V	Frosted Lens	120-347V	4000K or 5000K		

CR180


Life Time : 50000hrs

### Dimension ( inch)

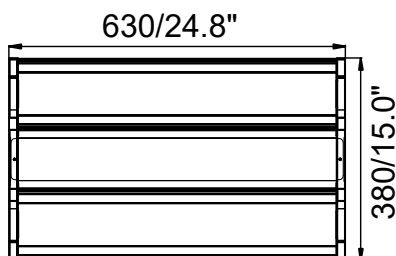

2FT

Depth : 2.2"

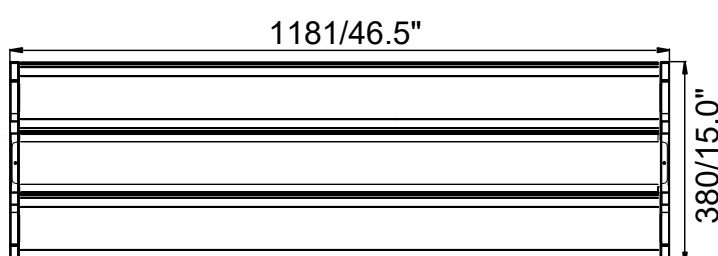

4FT

Depth : 2.2"



## Mounting

- Chain mounting ready
- Surface Mounting, Pendant Mounting

## Warranty

- 5-year warranty



## Applications

- Designed to meet recommended luminance and illuminance requirements for High bay and Low bay applications.



## Ratings

- DLC Listed
- RoHs
- UL 1598 suitable for damp locations
- UL 8750 LED equipment in Lighting Products
- Temperature Rated at  $(-20^{\circ}$  to  $+50^{\circ})$   $(-4^{\circ}$  to  $122^{\circ})$
- The 0-10V Dimming type is continuous
- The product can dim to 10%

### Chain Kit

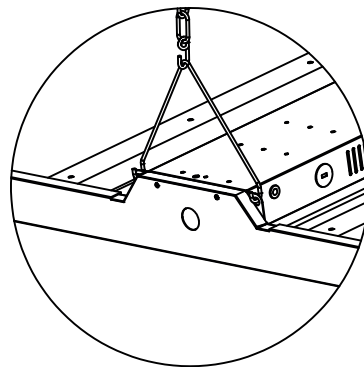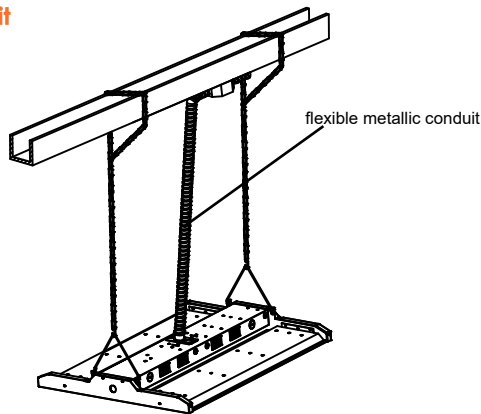

### Surface Mounting

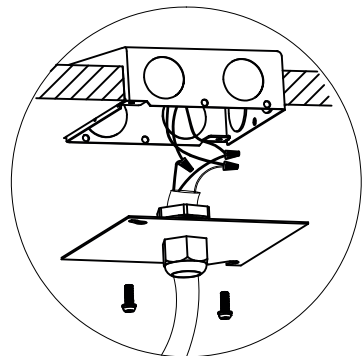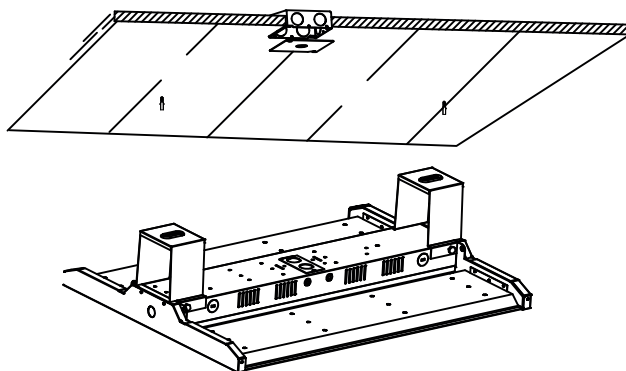

### Pendant Hanger

