

4FT Linkable Wrap Light LED 3Way CCT Changeable




5520 LM



Specification

Model No.	Power	Input Voltage	Brightness	CCT	L x W x H
VO-WR5FT4W48-120-3Way-L	48W	120-277V	5520LM	3Way CCT Adjustable (3000K/4000K/5000K)	47.2" x 5.3" x 2.1"

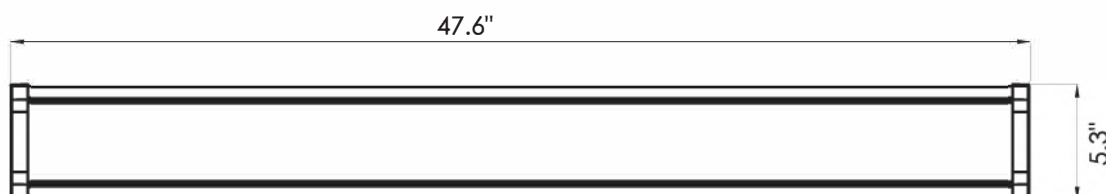

General Characteristics

Fixture Life Hours	50000 Hours
Bulb	Integrated LED
Lumens Per Watt (LPW)	115.00

Safety Rating	ETL - Damp Location
---------------	---------------------

Fixture Characteristics

Shape	Linear
Mounting	Surface / Suspend
Use Location	Indoor

Electrical Characteristics

Watts	48 W
Volts	120-277V
Power Factor	0.95
Operating Temperature	-20°C to 45°C (-4°F to 113°F)

Light Characteristics

Brightness	5520 Lumens
Color Accuracy (CRI)	80
Color Temperature	3000K/4000K/5000K Adjustable
Beam Angle	110°

Product Dimensions

Item Dimensions (in)	(L) 47.6 (W) 5.3 (H) 2.1
----------------------	--------------------------

Options:

(Sell Separately)

Double Head Male Connector
Linking Cable
Power Cord
Chain Kit

Options:

(Sell Separately)



Connector




Linking Cable



Power Cord






Chain Kit






4FT Linkable Wrap Light LED 3Way CCT Changeable


Surface Mounting

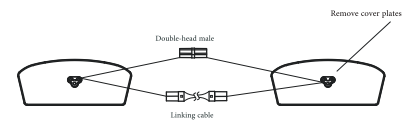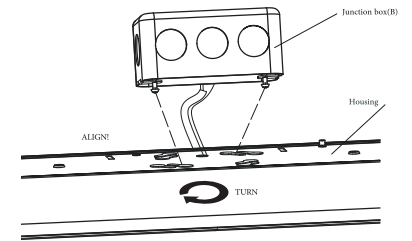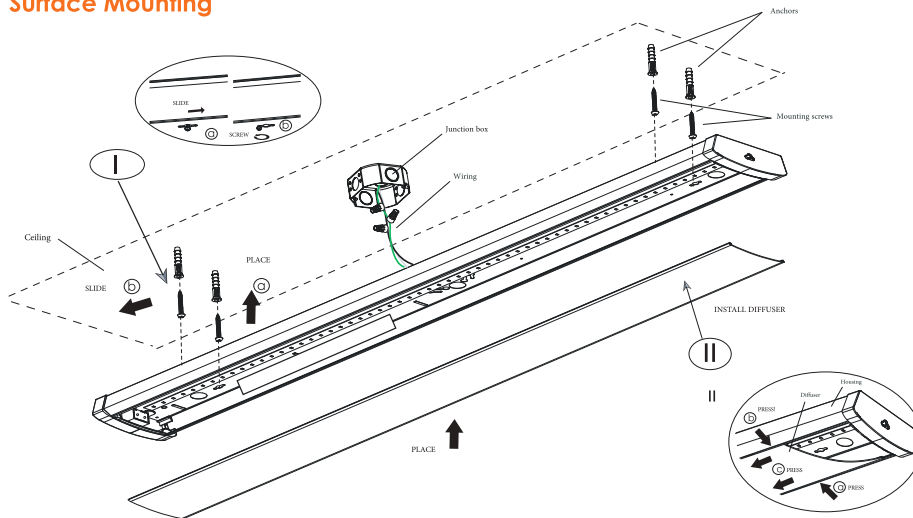

Suspension Mounting

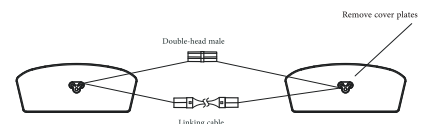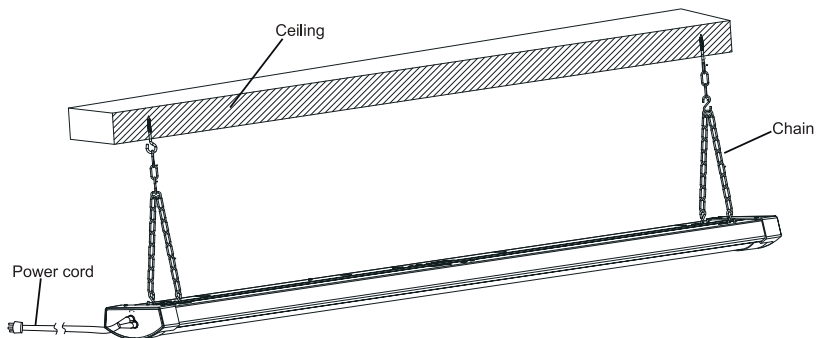

Goniophotometer Test

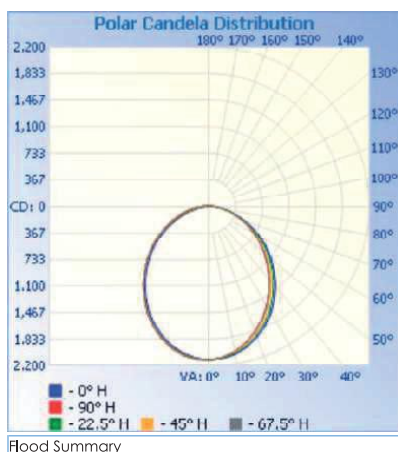

Flood Summary		Efficiency	Lumens	Horizontal Spread	Vertical Spread
Field (%10):	%96.7	5,219.0	161.9	156.3	
Beam (%50):	%64.7	3,489.3	99	101.8	
Total:	%99.9	5,389.7			

Illuminance at a Distance		Center Beam FC	Beam Width
0.7ft	4,758.52 fc	1.6ft	1.6ft
1.3ft	1,189.63 fc	3.3ft	3.1ft
2.0ft	528.73 fc	4.9ft	4.7ft
2.7ft	297.41 fc	6.6ft	6.2ft
3.3ft	190.34 fc	8.2ft	7.8ft
4.0ft	132.18 fc	9.8ft	9.4ft

Vert. Spread: 101.8° Horiz. Spread: 99.0°

