


Adjustable Wall Pack (Power Changeable)



Technical Specifications

Model No.:	WP05-40M-S-50	WP05-60M-S-50	WP05-100M-S-50
Input Power	40W/30W/20W/15W Adjustable	60W/50W/40W/30W Adjustable	100W/80W/70W/60W Adjustable
Lumens	5600LM	8400LM	14000LM
Efficiency	140LM/W		
Lighting Distribution	TYPE II		
Input Voltage	120-347V		
CCT	5000K		
CRI	>70		
Adjustable Angle	0-90°		
THD	<%20		
Surge Protection	L-N : 2KV L/N-PE: 4KV		
Additional Function	0-10V Dimming / Power Adjustable		
Certification	ETL / cETL / DLC Premium		
IP Rating	IP65		
IK Rating	IK08		
Product Finishing	Bronze		
Housing Material	Die-Cast Aluminium		
Lens	Polycarbonate Lense		
Life Time	50/000 Hours		
Operating Temperature	-22°F to 113°F		
Storage Temp	-40°F to 158°F		
Installation	Junction box		
Warranty	5 Years Limited		

Description:

VOTATEC's LED adjustable wall packs provide die-casting aluminium alloy heat sink. Adjustable direction can be available from 0-90 degree, so forward throw illumination can be precisely aimed. This is an ideal commercial outdoor fixture for buildings, and easily replace to any wall packs light, no matter full cut-off wall packs or semi cut-off wall packs.



Optional Features

- Up to 140 lm/W.
- Easy installation.
- Wet location rated IP65.
- ETL/cETL/DLC Premium listed.
- Durable die-casting aluminum housing.
- UV-resistant polycarbonate refractor lens.
- Type II distribution optics standard.
- 10-0V dimming, 10-1V dimming drivers, DIP switch available.

Applications


Building facade, commercial, industrial, retail, hospitality buildings that demand long service life and low maintenance. All application where could be applied to full cut-off wall pack light and semi cut-off wall pack light.

Features




DIP Switch Inside the box, Lower Inventory


Dimensions

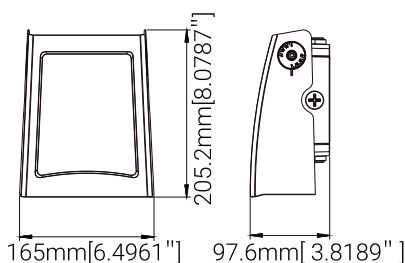

40W

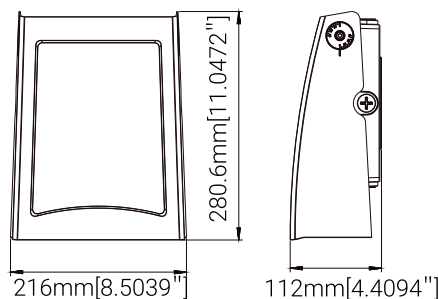

60W

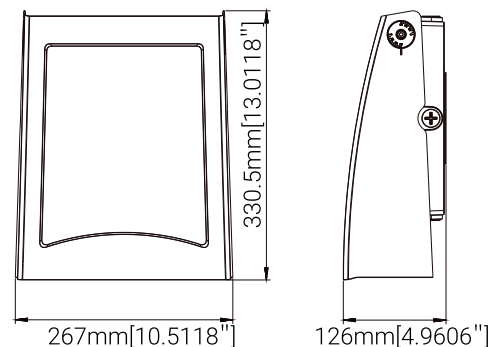

100W

