

## **PENDANT LIGHT**

ICH277B03 09/13

#### QUESTIONS OR CONCERNS CONTACT CANARM AT:


1-800-265-1833 (English) 1-800-567-2513 (French) / Monday through Friday 8:00 AM to 5:00 PM E.S.T.



INSTRUCTIONS PERTAINING TO RISK OF FIRE OR INJURY TO PERSONS READ ALL INSTRUCTIONS

# IMPORTANT SAFETY INSTRUCTIONS SAVE THESE INSTRUCTIONS


#### TOOLS AND MATERIALS REQUIRED:




#### **SAFETY PRECAUTIONS:**

- 1.TURN OFF ELECTRICAL POWER BEFORE STARTING INSTALLATION OF LIGHT FIXTURE.
- 2. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.
- 3. CONNECT THE GROUND WIRES (BARE COPPER OR GREEN) FROM YOUR FIXTURE TO THE GROUND WIRE (BARE COPPER OR GREEN) OR GROUND SCREW IN THE ELECTRICAL OUTLET BOX.


### **INSTALLATION:** NOTE: Product May Not Look Exactly As Shown In Figures.



Mount the mounting bracket to outlet box using outlet box screws (not included). Make sure the studs or nipple on the mounting bracket are facing out from the outlet box.




Tuck electrical wires into outlet box and position fixture over studs on mounting bracket assembly. Secure fixture in place with star washer(s) and cap nut(s).




2. Adjusting the length of flexible cord.

Loosen the plastic screw for adjusting the length of flexible cord. Re-tighten plastic screw after adjusting. Adjust the height of the fixture by pushing the button.

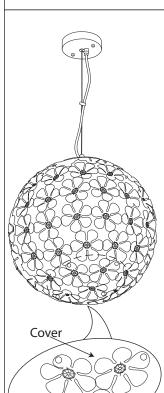


5 Remove the cover. Install proper bulb type and wattage (not included). Attach the cover in palce by tightening the 4 screws.



Once connections of wires are completed, carefully tuck wires and wire nuts into the outlet box making sure no bare wire (on the black and white) is visible at the wire nuts.

Imported By: CANARM LTD., 2157 Parkedale Ave., Brockville, Ontario, K6V 5V6, Tel: (613) 342-5424, Fax: (800)263-4598



Screw