
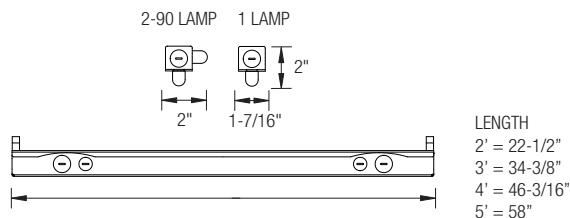


T5 SLIM HIGH PERFORMANCE ARCHITECTURAL COVE LUMINAIRE (1 LAMP)

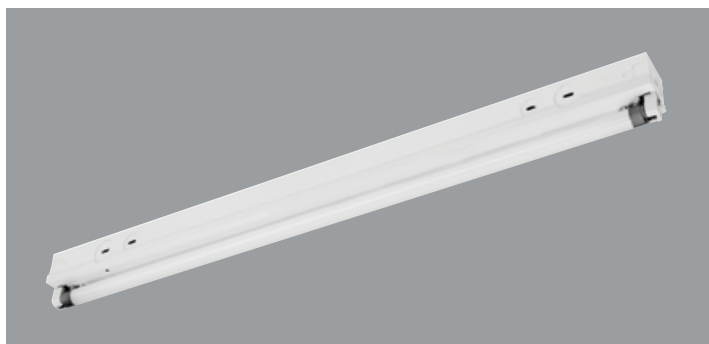

APPLICATION:

Ideal for coves, shelves, displays or any other retail applications.

PRODUCT FEATURES:

- Exclusively designed for the T5 lamp, the OST5 utilizes small T5 sockets and T5 ballasts
- 2', 3' & 4' housings are designed to be surface, chain, or cable mounted in continuous rows or individually
- Multiple knockouts allow for top side and back mounting
- Heavy-duty 20-gauge steel utilized throughout for durability and code compliance
- Post-painted to insure against exposed metal surfaces
- Pretreated with five-stage iron phosphate process to ensure superior paint adhesion
- Exclusive T5 socket features rotating collar and enclosed contacts
- Row mounting coupler supplied with all luminaires
- Lightweight design enables for quick, easy installation
- Thermally protected, re-setting, Class P NPF, non-PCB and UL listed ballast
- Suitable for dry and damp environments
- NEC required ballast disconnect is standard

LISTING

UL/C-UL listed to US and Canadian standard

WARRANTY

Guaranteed for one year against mechanical defects
Specifications subject to change without notice

T5
OST5

2' Fluorescent Slim Architectural Cove Luminaire

Ordering Information > Example: 2-OST5-1-14-T5-MVOLT-EMG-T5-T5HO-700

2	OST5	1							
FIXTURE SIZE	SERIES	LAMPS	WATTAGE	VOLTAGE	# OF BALLAST	BALLAST FACTOR			
2'-2'	OST5-Oracle T5 Low Profile Reflector Strip	1	22" FIXTURE 14-T5 (1 lamp/14W/T5) 24-T5HO (1 lamp/24W/T5HO)	(Blank)- 120 MVOLT- 120/277 277- 277	(Blank)- 1 Ballast	(Blank)- Normal BF			

REMOTE EMERGENCY BATTERY PACK OPTIONS (L. = LUMENS)

ORDER CODE	DESCRIPTION
EMG-T5-T5HO-700	Up to 700 L. for T5 or T5HO

BALLAST CONFIGURATION & CODE		
14W/T5	24W/T5HO	DESCRIPTION
-	-	Electronic Instant Start
(Blank)	(Blank)	Electronic Program Start

Consult Factory for ADVANCE or LUTRON dimming ballast options.

WIRING OPTIONS	
C3	- 6' 3-wire Flex Cable (Single Circuit)
C4	- 6' 4-wire Flex Cable (Double Circuit)
FBF	- Internal Fast Blow Fuse
SBF	- Internal Slow-Blow Fuse
RIS	- Radio Interference Suppressor

OTHER OPTIONS	
OST5WG	- Wireguard
USA	- Made in America Compliance