Each Norwell light fixture has a mounting bar or plate to secure it to the electrical junction box. No matter what type of mounting bar/plate your fixture uses, installation requires three basic steps.

- 1. Attach the mounting bar/plate to the electrical junction box.
- Connect the electrical wires from the junction box to the electrical wires from the fixture.(Black to Black, White to White and Green to Ground)
- 3. Secure the fixture to the mounting bar/plate.


Norwell Lighting

INSTRUCTIONS

1252

INSTALLATION OF FIXTURE

- CONNECT THE ELECTRICAL WIRES FROM YOUR
 POST TO THE WIRES FROM THE FIXTURE USING
 WIRE NUTS. (BLACK TO BLACK, WHITE TO
 WHITE, GREEN TO GROUND)
- ATTACH THE FIXTURE TO THE POST, USING THE MOUNTING SCREWS. ENSURE THE FIXTURE IS SNUG AND SECURED TO THE POST.
- 3) LAMP FIXTURE WITH THE REQUIRED NUMBER OF LAMPS AND WATTAGE PER FIXTURE.
- SLIDE THE GLASS DIFFUSER INTO THE FRAME AND ENSURE THAT THE GLASS SITS FLAT ON THE FRAME.

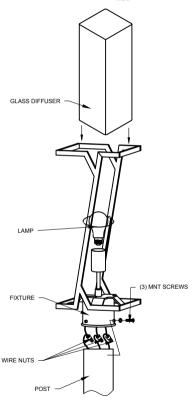



Be sure the power is turned off by either by removing the fuse or closing the circuit breaker.

All assembly and installation work must be in accordance with National, State and Local electrical codes. We strongly advise using a licensed
 electrician.

Be aware that the weight of some fixtures may exceed the strength rating of the 4" electrical junction box or other such hardware

or your site. In all cases, it is the responsibility of the contractor to properly secure the fixture to the structure, and to provide

adequate support for the future.

Due to constant production improvements, details of the design, material or finish may change in any way that will not significantly alter
installed appearance or reduce furction or performance.

© Norwell Manufacturing Company Inc. - East Taunton, MA 02718 Tel: 508-977-9991 www.Norwellinc.