


# INSTALLATION INSTRUCTIONS

## 62000-4USB58 4 Port USB Charger

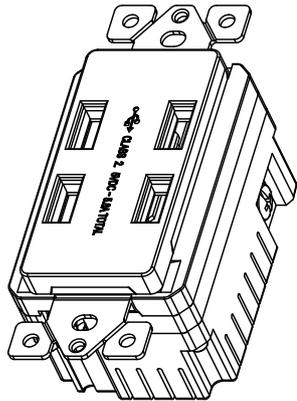

### SPECIFICATIONS

USB Rating.....	4 USB ports with total 5.8 Amp, 5VDC
Voltage.....	125VDC
Wire Terminals.....	#14-#12 AWG
Operating Temperature.....	-4 to 140°F (-20 to 60°C)
USB Compatibility.....	USB 1.1/2.0/3.0 devices, including Apple products
Receptacle Dimension .....	3-3/4"×2-1/4"×3-3/16"

### DESCRIPTION

Our High Speed USB ports deliver the most advanced charging technology and optimizes current by using a smart chip to reduce charging time to devices. It is able to charge four devices simultaneously, including smart phones, tablets, e-readers, cameras and MP3 players. You'll have the ability to charge virtually any device without the use of bulky adapters that can be lost or misplaced.

### FEATURES

- Quad USB High Speed charger with a total of 5.8 Amp, 5VDC.
- Charges most USB compatible devices directly without an adapter.
- Replaces a standard duplex receptacle.
- Wire terminals are designed for easy installation from the back or side.

### WARNING

**Turn the POWER OFF at the circuit breaker before installing the USB Receptacle.**

Read and understand these instructions before installing. This device is intended for installation in accordance with the National Electric Code and local regulations. It is recommended that a qualified electrician performs this installation. Make sure to turn off the circuit breaker or fuse(s) and make sure power is off before wiring the device.


Use copper wires only.

This USB receptacle **CANNOT** be used if the outlet you are replacing has the top and bottom outlets controlled by separate circuit breakers.

### WIRING DIRECTIONS

There are two ways to wire the receptacle:


1. Loop wire around terminal screws and firmly tighten terminal screw.
  2. Insert wire(s) through terminal holes in the back, then tighten terminal screws. Use this method when attaching 2 wires to same terminal.
- Connect BLACK/HOT wire to the HOT terminal (brass screw).
  - Connect WHITE/NEUTRAL wire to the NEUTRAL terminal (silver screw).
  - Connect GREEN/GROUND wire to the GROUND terminal (green screw).

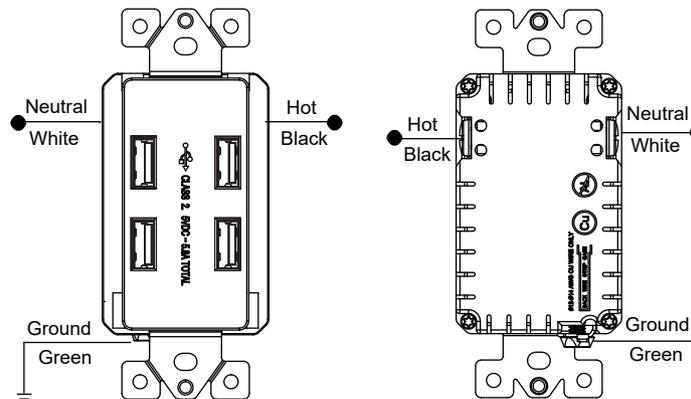

### COMPATIBILITY

This USB Charger is compatible with a wide range of electronic devices including, but not limited to, the following:

- iPad® Pro
- iPad® Air
- iPad® Mini
- iPhone® 6/ 6 Plus
- Tablets
- Mobile Phones
- Bluetooth™ Headsets
- Wearable Devices
- Digital Cameras
- HTC One X9™
- HTC One S9™
- Samsung Galaxy S7™
- Samsung Galaxy Note 7™
- Galaxy Tab™
- Drones
- Other Smart Phones and USB Compatible Products

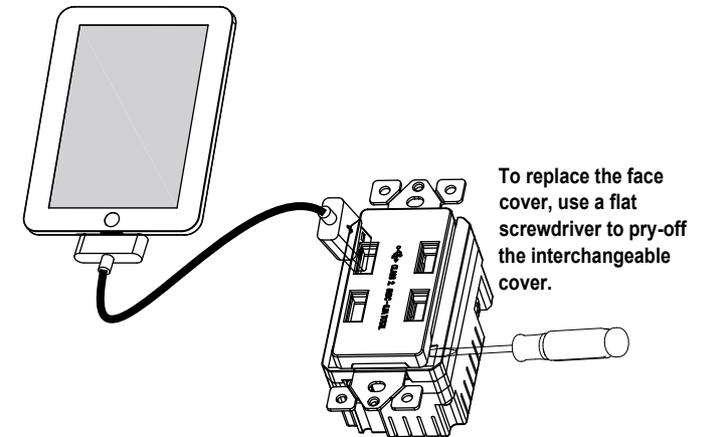

### WARRANTY INFORMATION

This device is warranted to be free of material and workmanship defects for 2 years from the date of purchase. Original receipt or proof of purchase from an authorized retailer must be presented upon warranty claim. ALL claims must be verified and approved by Enerlites, Inc. Warranties from other Enerlites products may vary. This warranty is nontransferable and does not cover normal wear and tear or any malfunction, failure, or defect resulting from misuse, abuse, neglect, alteration, modification, or improper installation. To the fullest extent permitted by the applicable state law, Enerlites shall not be liable to the purchaser or end user customer of Enerlites products for direct, indirect, incidental, or consequential damages even if Enerlites has been advised of the possibility of such damages. Enerlites' total liability under this or any other warranty, express or implied, is limited to repair, replacement or refund. Repair, replacement or refund are the sole and exclusive remedies for breach of warranty or any other legal theory.



© 2017 Enerlites Inc.  
CA, U.S.A.  
WWW.ENERLITES.COM  
0210250106-01  
REV 20230803