

**Description:** 24V, 75W Constant Voltage LED Driver. Universal input range of 100-277VAC.  
One 24V independent, constant voltage output channel.


**This Driver Will Operate The Following LED Modules:**

LED module designed to accept constant voltage input of 24V and has a maximum input current of 3.125A.  
Note: Constant voltage modules are usually with on-board circuit besides LEDs, the module & driver compatibility check is preferred before any installation.

**ELECTRICAL DATA**

Input Voltage	100-277VAC, 50/60Hz
Input Current	0.89A@100V, 0.31A@277V
Input Power	89W
Power Factor	>0.9
THD	<20%
Driver Type	Constant Voltage
Output Voltage	24VDC
Output Current Range	0-3.125A
Output Wattage	75W
Number of Output Channels	1
RFI/EMI	FCC PART 15B CONSUMER, EN55015
Output Type	CLASS 2, LVLE
Ambient Operating Temperature Range	-20°C to 53°C
Max Case Temperature at Tc	88°C
Sound Rating	A
Protections	Input Surge Protection
	Input Current Protection
	Output Short Circuit Protection
	Output Open Circuit Protection
	Output To Ground Short Protection
	Overload Protection
Expected Service Life	5 YEARS
Approvals / Class	cURus Class 2, IP64, CE, RoHS, Dry or Damp Locations, Type TL/HL, LVLE

**MECHANICAL DATA**

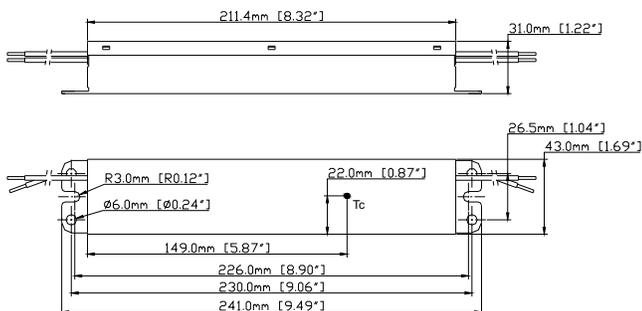

**WIRING DIAGRAMS**

INPUT SIDE	LENGTH	OUTPUT SIDE	LENGTH
WHITE	300mm [11.8"]	RED	300mm [11.8"]
BLACK	300mm [11.8"]	BLUE	300mm [11.8"]



Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 5 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog ([www.fulham.com](http://www.fulham.com))

**Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.**