MaxLite®
A NEW WAVE OF LIGHT

PROJECT NAME:_____ CATALOG NUMBER:_____

NOTES:_____FIXTURE SCHEDULE:_____

LED T5 LAMP READY HIGHBAY
BLHT SERIES

BLHT8XT5

BLHT6XT5

BLHT4XT5

c(UL)us LISTED

DAMP LISTED

5 YEAR WARRANTY

PRODUCT DESCRIPTION:

The Lamp Ready Linear High Bay provides distributors, contractors, and buyers with a UL listed fixture designed specifically for energy-saving LED T5 lamps. The fixture housing is constructed of the same durable material as commercial- and industrial-grade fluorescent and LED PCB versions, while adding flexibility and economy for installers in the field. Ideal for high bay, low bay, assembly, warehouse, and general indoor lighting applications, the Lamp Ready fixtures support competitive light output when used with MaxLite brand T5 LED single ended lamps.

Single ended T5 LED internal driver lamps (4') must be purchased separately from MaxLite for this product.

FEATURES:
- ***Lamps sold separately***
- Lamps **not included**
- Lead wires are 7' for tandem wiring
- Sockets are wired in series via non-shunted sockets
- Operating humidity 10% to 80% RH non-condensing
- Suitable for Damp Locations

CONSTRUCTION:
- 22 Gauge Galvanized Steel, white post painted baked on enamel.
- High Polish Reflector – 86% enhanced
- Damp rated housings
- Supplied with ONLY non-shunted sockets and single ended wiring configurations. For questions, contact MaxLite.
- Fits current MaxLite Linear HB door, wire guard, and lens

CONTROL:
- Optional occupancy sensor available* (on/off)

WARRANTY:
5-year standard warranty
(further details available at www.maxlite.com/warranties)
Product may be eligible for a warranty extension to 10 years, for an additional fee. Contact MaxLite for details.
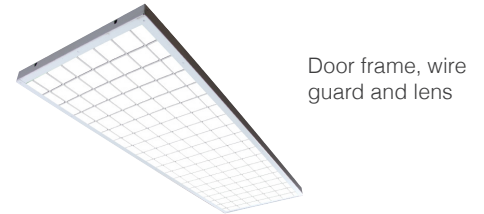
ORDER NUMBER	MODEL	DESCRIPTION	DIMENSIONS (L" x W" x H")
14099836	BLHT4XT5USE4810	HIGHBAY LINEAR LAMP READY 4XT5 LED 120-277V SINGLE ENDED	48L X 10W X 3
14099837	BLHT6XT5USE4815	HIGHBAY LINEAR LAMP READY 6XT5 LED 120-277V SINGLE ENDED	48L X 15W X 3
14099838	BLHT8XT5USE4820	HIGHBAY LINEAR LAMP READY 8XT5 LED 120-277V SINGLE ENDED	48L X 20W X 3

NOTES:
1. For ordering Occupancy sensor, add "MSO" suffix to model number

T8 & T5 HIGHBAY ACCESSORIES:

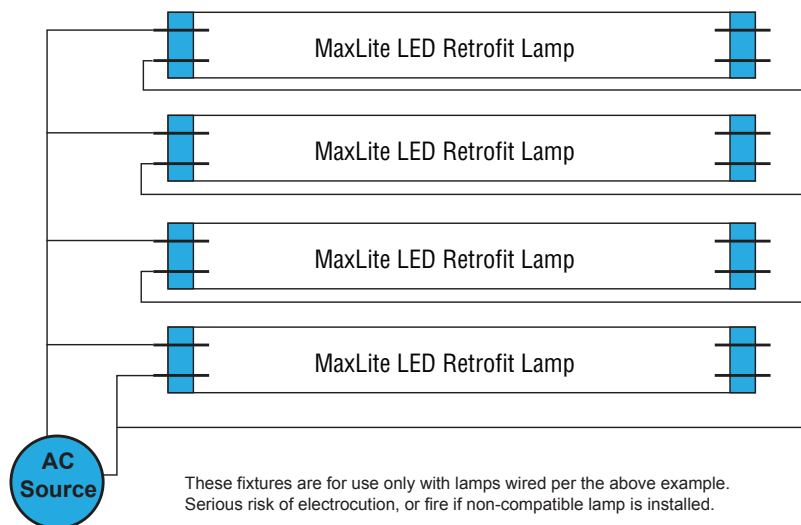| ORDER CODE	ITEM NUMBER	DESCRIPTION
70224	SKFHBLC120	120V 10' cord with plug
70225	SKFHBLC277	277V 10' cord with plug
71415	SDT480-277-4	4 lamp T8 & T5 step down transformer (347-200V & 480-277V)
71414	SDT480-277-6	6 lamp T8 & T5 step down transformer (347-200V & 480-277V)
71119	MLCHKSQ	Linear highbay cable hanging kit
71827	MLFHBL4DF	4 Lamp T5/T8 door frame and lens
71826	MLFHBL6DF	6 Lamp T5/T8 door frame and lens
72447	MLFHBL8DF	8 Lamp T5/T8 door frame and lens
72053	MLFHBL4DFWG	4 Lamp T5/T8 door frame and wire guard
72054	MLFHBL6DFWG	6 Lamp T5/T8 door frame and wire guard
72887	MLFHBL8FWG	8 Lamp T5/T8 door frame and wire guard
72049	MLFHBL4DFWGL	4 Lamp T/5T8 door frame, wire guard and lens
72050	MLFHBL6DFWGL	6 Lamp T5/T8 door frame, wire guard and lens
72448	MLFHBL8DFWGL	8 Lamp T/5T8 door frame, wire guard and lens

Door frame, wire guard and lens

Door frame and wire guard

Door frame and lens

IMPORTANT WARNING:

MaxLite LED Retrofit Lamp

MaxLite LED Retrofit Lamp

MaxLite LED Retrofit Lamp

MaxLite LED Retrofit Lamp

AC Source

These fixtures are for use only with lamps wired per the above example.
Serious risk of electrocution, or fire if non-compatible lamp is installed.