

**SAFETY INFORMATION**

Please read and understand this entire manual before attempting to assemble, install or operate the product.


**WARNING**

- RISK OF ELECTRIC SHOCK - Before beginning installation, turn off electricity at the circuit breaker box or the main fuse box.
- RISK OF FIRE - Use bulbs specified by the markings and/or labels on the fixture.

**CAUTION**

- For your safety, read instructions completely before beginning installation.
- If in doubt about electrical installation, consult a licensed electrician.
- Turn off electricity to fixture before replacing the bulb(s).

**TOOLS REQUIRED**

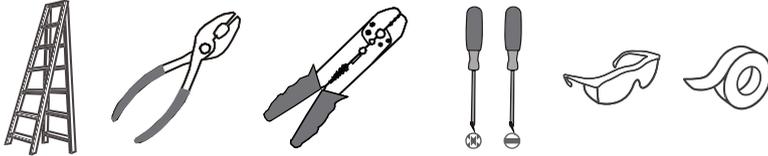


**CARE AND MAINTENANCE**

- Wipe clean using soft, dry cloth or static duster. Always avoid using harsh chemicals and abrasives to clean fixture as they may damage the finish.


If you need further assistance call Quozel Customer Care at 1-800-645-3184 (9:00am - 5:00pm EST), or visit us on-line at [www.quezel.com](http://www.quezel.com).

**PACKAGE CONTENTS**


**MOUNTING HARDWARE**

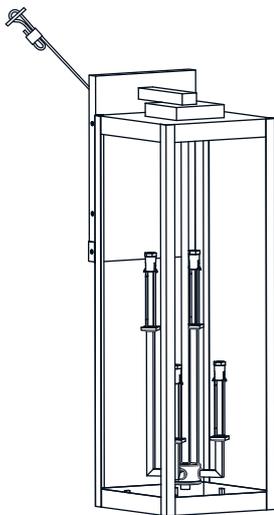

**A** Fixture Body  
x 1




**B** Glass panel  
x 4



**AA** Inner Backplate  
x 1



**BB** Mounting Screw  
x 4



**CC** Wire Connector  
x 3




**DD** Outlet Box Screw  
x 2



**C** Lock Screw  
x 8



**D** Curved Plate  
x 4



**EE** Wall Anchor  
x 4




**FF** Screw  
x 4



**E** Candle cover  
x 4

# INSTALLATION

## 1 Install Candle Cover and Bulbs

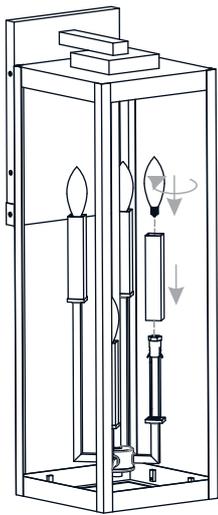


Install four correct bulbs referring to fixture markings and/or labels for maximum wattage.

**Recommended Bulb Type (not included):**


 **BULB BASE TYPE**  
Candelabra (E12)

 **BULB SHAPE TYPE**  
TYPE B


## 2 Install Glass Panels

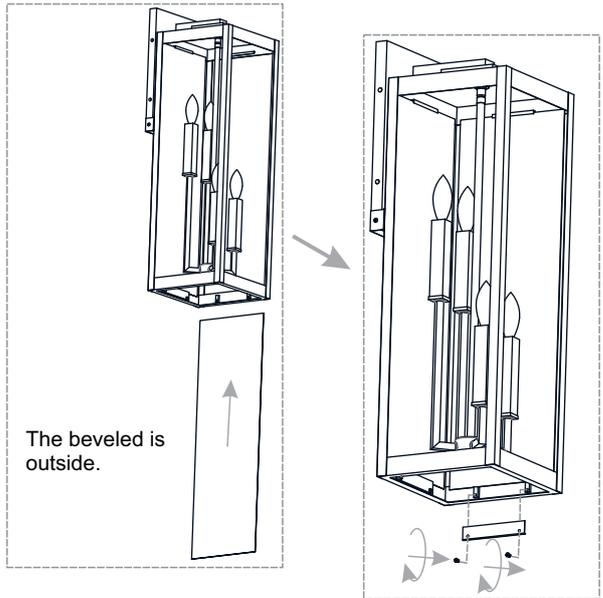


## 3 Install Inner Backplate

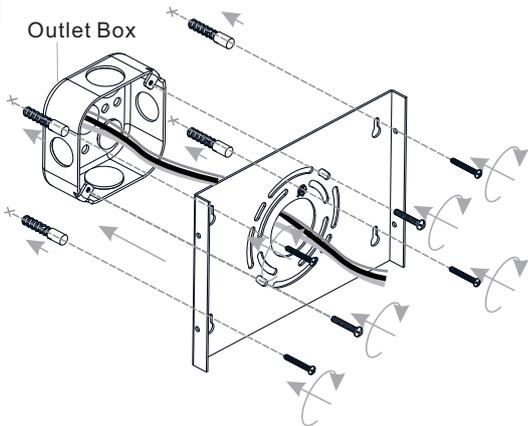

## 4 Wiring

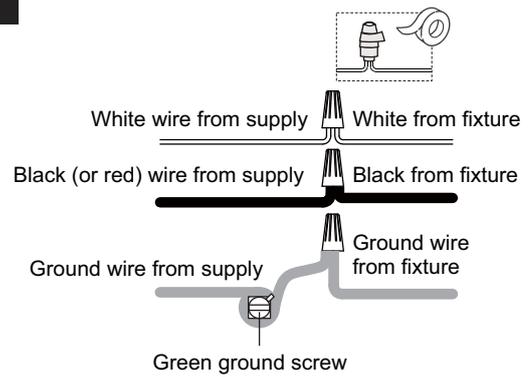


## 5 Install Lanyard and Fixture Body

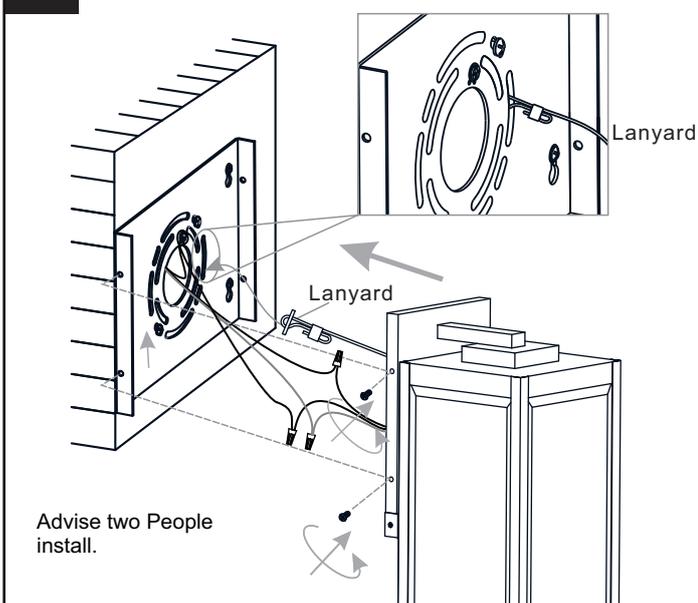


## 6 Apply Caulking

\* Note: Do NOT caulk the bottom of the backplate to allow moisture to escape.

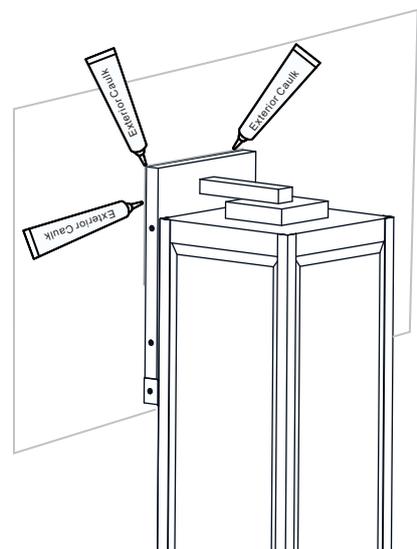


Your installation is now complete! Restore electricity and save this sheet for future reference.

**1** Remove Curved Plate

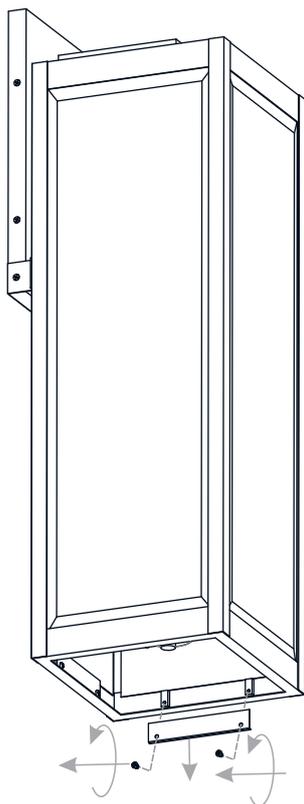

**2** Remove Glass Panel and Bulb

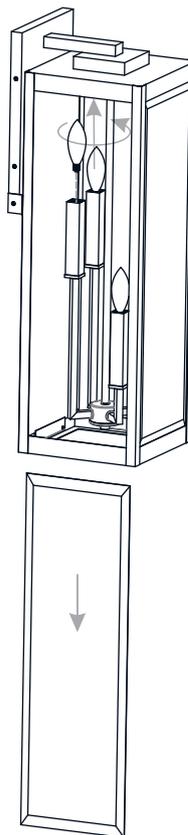

Reverse above steps to reinstall the replacement Glass panels onto fixture.