# TUROLIGHT ®

## LED Emergency
### TL-RMES201
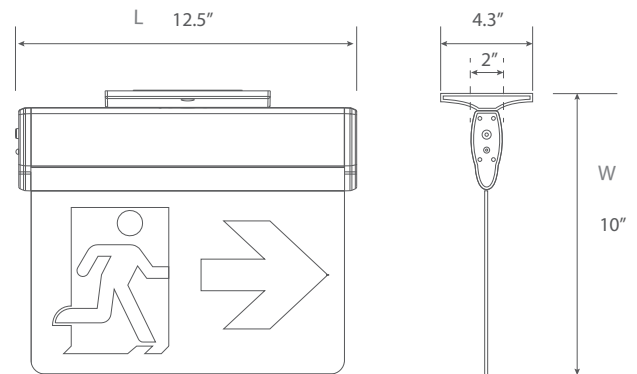"Running Man" LED Edge-lit Emergency Sign

**Damp Location**

c(UL)us LISTED

## Features & Benefits

Injection-molded thermoplastic ABS housing

Easy installation

Ni-cd battery backup for 90 minutes, AC only & 6-24V UDC (TL-RMES201-UDC)

Universal (Wall, Side, Ceiling) mounting

Super bright SMD LED

120/347VAC input voltage, 3W

3 Pictograms included, single/ double face

cUL listed / IP20

Test switch and charge indicator light

## Warranty

2-year limited warranty in commercial use from the date of purchase

Operating temperature range between 0˚C and +40˚C

## Dimensional Drawing

L    12.5"
4.3"
2"
W
10"



Arrow 2pcs



Without Arrow 1pc

## Ordering Information    Example: **TL-RMES201**

| Family Name | Fixture Type | Model |
|---|---|---|
| TL (Turolight) | RMES ("Running Man" Emergency Sign) | 201 (Edge-lit Emergency Sign ) |
| | | 201-UDC (Edge-lit Emergency Sign , AC only & 6-24V UDC) |

## Product Specification

| Ordering Code | Model Number | Description | Wattage (W) | Input Voltage (V) | Mounting | Remote Capable | Self Powered Battery | Damp Location | Dimensions* L×W (inch) | Case QTY. |
|---|---|---|---|---|---|---|---|---|---|---|
| 3461115 | TL-RMES201 | "Running Man" LED Edge-lit Emergency Sign, White Plastic Housing AC only | 3W | 120/347VAC | Wall, Side, Ceiling | No | Yes (90 minutes) | Yes | 12.5"×10" | 10 |
| 3461117 | TL-RMES201-UDC | "Running Man" LED Edge-lit Emergency Sign, White Plastic Housing AC only & 6-24V UDC | 3W | 120/347VAC | Wall, Side, Ceiling | Yes | No | Yes | 12.5"×10" | 10 |

* Please see the "Dimensional Drawing" for detail