


54W LED Retrofit Lamp

Order Code: LP21781

DLC® Model# OR054B39D-4000K

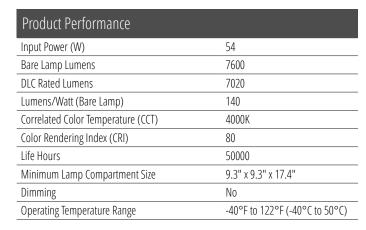

Physical Characteristics	
Base Type	Mogul (EX39)
Overall Length A	11.34" (288mm)
Diameter B	3.66" (93mm)
Weight	2.1 lbs (955 g)

Electrical Characteristics	
Input Voltage Range	100V-277V; 50/60Hz
Driver	Internal within lamp
Power Factor	>0.90
THD	<20%

Regulatory Qualifications
cULus Listed
cULus Classified - Certified to UL 1598C
DLC® Qualified - Model# OR054B39D-4000K

Accessories

SP12714 - 120-277V Surge Protector



Description

Venture Lighting's LED Retrofit lamps are the ideal upgrade solution to traditional HID lamp technologies. Venture's LED Retrofit lamps are a simple energy saving solution for providing significant maintenance savings. The integrated driver design is an ideal upgrade from traditional technologies.

Features & Benefits

- Energy Saving Replacement for MH or HPS
- Up to 5 times longer life and 80% energy savings compared to HID
- 5 year warranty
- Universal burn position
- Easy installation
- Reduced maintenance costs

Applications

- Post top
- Wall pack
- Area Lighting
- Flood lighting
- · Garage lighting
- General illumination

- The use of an external surge protection device is recommended.
- Operating temp. range between -40°F and 122°F (-40°C and 50°C).
- Suitable for use in open and enclosed luminaires.
- Suitable for use in dry and damp environments.
- Do not use where exposed to water or outdoors without an appropriate enclosed luminaire.
- Lamps have clear polycarbonate cover lenses


Note: It is the customer's responsibility to verify that the dimensions of the LED retrofit lamp will fit the luminaire prior to ordering.








Venture 54W LED Retrofit Lamp





Easy to install - bypass ballast and provide voltage directly to lamp

(800) 451-2606 Fax: (800) 451-2605 7905 Cochran Rd, Suite 300 Glenwillow, Ohio 44139 E-mail: Venture_Lighting@VentureLighting.com VentureLighting.com

