



Description

Venture Lighting's LED Retrofit lamps are the ideal upgrade solution to traditional HID lamp technologies. Venture's LED Retrofit lamps are a simple energy saving solution for providing significant maintenance savings. The integrated driver design is an ideal upgrade from traditional technologies.

Features & Benefits

- Energy Saving Replacement for MH or HPS
- Up to 5 times longer life and 80% energy savings compared to HID
- 5 year warranty
- Universal burn position
- Easy installation
- Reduced maintenance costs

Applications

- Post top
- Wall pack
- Area Lighting
- Flood lighting
- Garage lighting
- General illumination

Notes

- The use of an external surge protection device is recommended.
- Operating temp. range between -40°F and 122°F (-40°C and 50°C).
- Suitable for use in open and enclosed luminaires.
- Suitable for use in dry and damp environments.
- Do not use where exposed to water or outdoors without an appropriate enclosed luminaire.
- Lamps have clear polycarbonate cover lenses

Note: It is the customer's responsibility to verify that the dimensions of the LED retrofit lamp will fit the luminaire prior to ordering.

Model# OR054B26D-4000K

Product Performance

Input Power (W)	54
Bare Lamp Lumens	7600
DLC Rated Lumens	n/a
Lumens/Watt (Bare Lamp)	140
Correlated Color Temperature (CCT)	4000K
Color Rendering Index (CRI)	80
Life Hours	50000
Minimum Lamp Compartment Size	9.3" x 9.3" x 17.4"
Dimming	No
Operating Temperature Range	-40°F to 122°F (-40°C to 50°C)

Physical Characteristics

Base Type	Medium (E26)
Overall Length A	10.35" (263mm)
Diameter B	3.66" (93mm)
Weight	2.15 lbs (977 g)

Electrical Characteristics

Input Voltage Range	100V-277V; 50/60Hz
Driver	Internal within lamp
Power Factor	>0.90
THD	<20%

Regulatory Qualifications


cULus Listed

Accessories

SP12714 – 120-277V Surge Protector



Venture 54W LED Retrofit Lamp

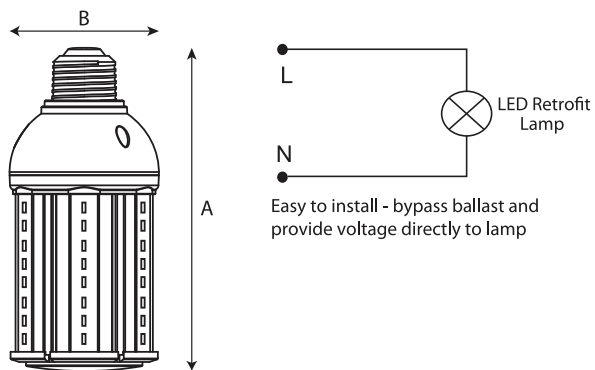

(800) 451-2606

Fax: (800) 451-2605

7905 Cochran Rd, Suite 300

Glenwillow, Ohio 44139

E-mail: Venture_Lighting@VentureLighting.com

VentureLighting.com

