



Type IC, Wet Location & Air-Tight


DESCRIPTION

3.5" Round Recessed Gimbal LED fixture
Regressed optics with low glare
Adjustable 10° each direction and with 360° rotation

FEATURES & BENEFITS

5CCT selectable 2700K to 5000K or **Dim to Warm** 3000K-1800K
CRI 90+ for true color rendering
3 3/8" Deep - fits in limited ceiling space
Type IC Rated - no housing required
Fast & Easy to install - save on labor
Driver Inside Connection Box - no junction box needed

DIMENSIONS ID 3 5/8" OD 4 3/8" Cut Out 3 3/4"

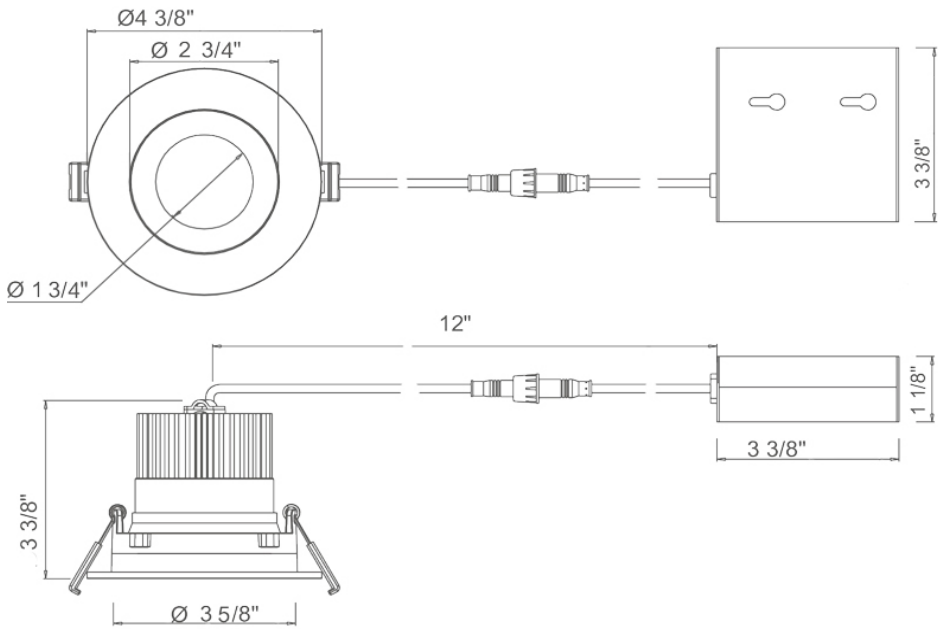

ORDERING GUIDE

	trim color	light color
AD-35-S12W-5CCT-WH-REY	White	5CCT selectable
AD-35-S12W-DTW-WH-REY	White	Dim to Warm

In stock: round white trim - 5CCT & Dim to Warm

Available as custom order MOQ 500 pcs:
Square trim, black trim, single CCT

AD-35-S12W-xx-WH-REY

3.5" Round Venus Adjustable Recessed LED 12W

Project: _____

Location: _____

Model: _____ Qty: _____


Notes: _____

SPECIFICATION	
Applications	Commercial & Residential Recessed
Energy Used	12 W
Color Temperature (K)	5CCT 27K-30K-35K-40K-50K Dim to Warm
Light Output (lm)	780-820-890-920-910 700
Halogen Equivalent	90 W
Beam Angle	38° wide beam with 10° tilt and 360° rotation
CRI	90 +
Driver Input	120V AC 50/60 Hz
Dimming	TRIAC Dimmers 5% - 100%
Junction Box Volume	9.69 cu in / max 5 No 12 AWG or 8 No 14 AWG
Approved Location	Insulated Ceiling & Wet Locations
Air Tight	Yes
Ambient Temperature	-4°F (-20°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cETLus, Energy Star, T24
Warranty	5 Year


Stock Trim - Round White



ACCESSORIES Sold Separately

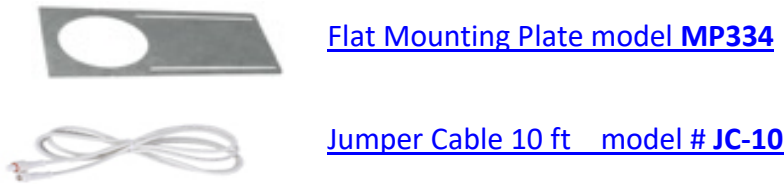

COMPLIANCE



Type IC
Air-Tight

Lotus LED Lights USA 250 H Street # 301, Blaine WA 98230 tel 360-200-5500 Hainesport NJ, Naples FL, Dallas TX, Vancouver WA	www.LotusLEDLights.com mailing addresses warehouses	Lotus LED Lights CANADA 702 Chester Rd, Delta BC V3M 6J1 tel 604-538-3090 Delta BC & Mississauga ON
---	---	---