

Version	2.0	Date	8/17/23
Prepared By	JC		

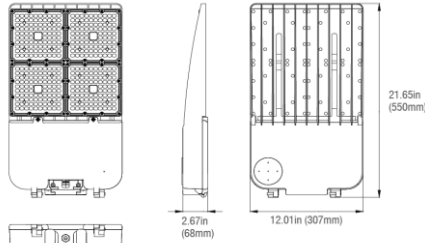
PRODUCT SPECIFICATION			
Category	Slim Area Light		
Item Number	9619		
Stock Code	FXSAL240SW/850/BZ/T3/480		
Mounting	Pole Mount/ Slip Fitter/ Yoke Mount/ Wall Mount		
Housing Color	Bronze (RAL#8019)		
PICTURE			

ELECTRICAL CHARACTERISTICS			
Rated Wattage (W)	160 / 190 / 240	Replacement Wattage (W)	400-1000
Tested Wattage (W)	-		
Input Voltage (V)	277-480	Surge Protect Level	10KV
Voltage Frequency (Hz)	50/60		
Input Current (A)	2.18	Dimmable	0-10V
Power Factor	>0.9	AUX (12V) Line	Yes
THD	<20%		

PHOTOMETRIC CHARACTERISTICS			
Lumen (lm)	22,500 / 30,000 / 34,680	CCT (K)	5000K
Efficacy (lm/w)	145	Beam Angle (°)	Type 3
CRI	>80		

GENERAL CHARACTERISTICS	
Operating Temperature (°F)	- 40°F ~ 122°
Storage Temperature (°F)	- 40°F ~ 140°F
IP Rating	IP66
IK Rating	IK08
Rated Life (Hrs)	50,000
Warranty (Yrs)	7

ACCESSORIES		
Item #	Stock Code	Description
P10453	MT-AL/PM6/BZ	6" Pole Mount Arm
P10455	MT-AL/SF/BZ	Slip Fitter
P10473	MT-AL/WM/BZ	Wall Mount
P10456	MT-SAL/YK12/BZ	12" Yoke Mount

PRODUCT DIMENSIONS			
Width- in / (mm)	12.01"	307	
Height- in / (mm)	2.67"	68	
Depth- in / (mm)	21.65"	550	
EPA (ft²)	0.25 ft² (@ 0 deg)		
Weight (lbs)	15.5		
Mounting Height (ft)	20~40		
Cable Length (ft)	1.64		

CERTIFICATIONS			
UL/ETL	ETL/cETL	CEC	
NSF/ETL Sanitation		JA8	
Energy Star		FCC	✓
DLC	5.1 Premium	RoHS	✓

DOCUMENTS			
LM79	✓	IES File	✓
LM80	✓	Dimmer List	

COMMENTS