

Performance			
Lamp	Number	1	
	Watts	1000W	
InputVolts		120V	240V
Input Current@1000W		9.30A	4.60A
Input Power@1000W		1085W	1055W
Min Power Factor		0.99	
THD		<10%	
Crest Factor		<1.7	

Protections
1.End of Lamp Life(EOL)Protection
2.Short circuit protection
3.Open circuit protection
4.Ignition failure protection
5.Thermal protection


Physical		
Case Length	270mm	10.75"
Case Width	134mm	5.50"
Height	68mm	2.68"
Weight	1.8kg	4.0lb

Dimming Type				
Gear	50%	75%	100%	Super Lumens


Installation & Application Notes
1.Max. allowable case temperature:75°C/167°F.
2.Ambient Temperature:-20...+40°C/-4...+104°F.
3.Max. Humidity:95%.
4.Ignition voltage is 5kV.
5.Remote Mounting: 16m/52ft.

Performance Requirements	
Rated mains voltage	120-240V
Voltage range (+/-10%)	108-264V
Mains frequency	50/60Hz
Operation frequency	80kHz


Main Dimension

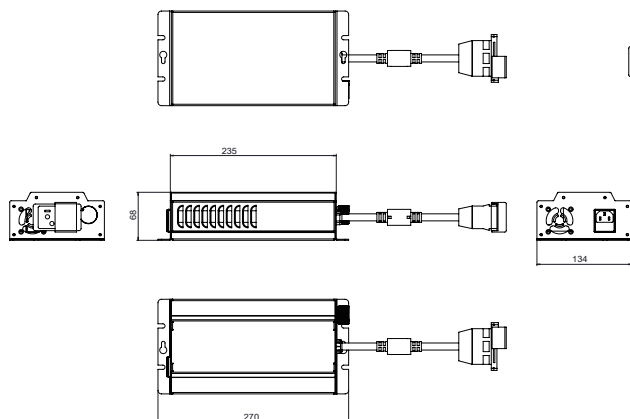

Wiring Diagram



Ballast case must be grounded

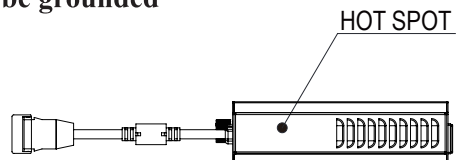

Tcase max=75°C/167°F

 **Allstate Garden Supply, Inc.**

12345 Mountain Ave #N-226, Chino, CA 91710

Toll Free: 855-826-5168 • Tel: 909-930-5828 • Fax: 909-930-0808 • Fax: 909-614-7755

www.allstategardensupply.com