

600W Sports Stadium Light



Suitable for indoor/outdoor recreational facilities,
high mast applications, dock yards and more

Multiple Drivers for
Maximum Redundancy

10kV Surge
Suppression

High Grade Stainless
Steel Hardware

15° Optics Available

0-10V Dimmable

Heavy-duty Flexible Yoke
for Precise Positioning
(Slip fitter mount available)

Superior 3D
Convection Design



Optional visor, laser pen for precision aiming, and slip fitter mount ordered separately.
See reverse for ordering details.

TECHNICAL DATA



LIGHT SPECIFICATIONS

Lumens	88,569.8 lm
Efficacy	150.48 lm/W
CCT	5000K
CRI	70
L70 Life	100,000 hrs
Dimmable	0-10V
Warranty	10-year

APPROVALS AND LISTINGS

cUL	E482965
DLC ID	PVZWQNOX

ELECTRICAL

Wattage	600W
Voltage	277-480V
Power Factor	0.90
THD	15%
Operating temp	-40° to 45°C

CONSTRUCTION


Housing	Aluminum
Finish	Black
IP Rating	IP65
Weight	69.66 lbs
Carton Qty	1

ILLUMINANCE AT A DISTANCE


	Center Beam fc	Beam Width	
17.0ft	1,964 fc	4.7 ft	4.6 ft
34.0ft	491 fc	9.5 ft	9.2 ft
51.0ft	218 fc	14.2 ft	13.9 ft
68.0ft	123 fc	18.9 ft	18.5 ft
85.0ft	78.5 fc	23.7 ft	23.1 ft
102.0ft	54.5 fc	28.4 ft	27.7 ft

■ Vert. Spread: 15.9°
■ Horiz. Spread: 15.5°

DIMENSIONS

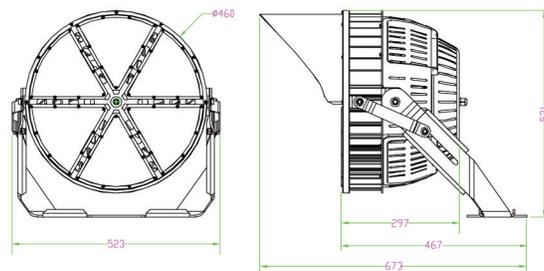

ISOCANDELA PLOT

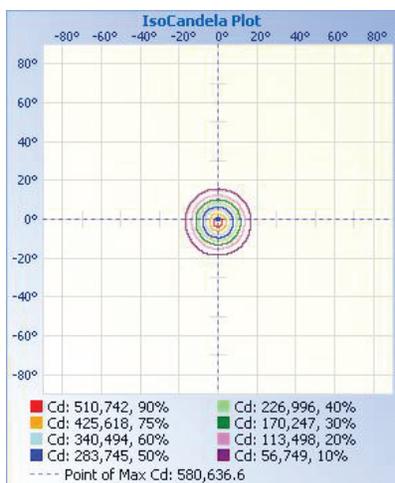

ACCESSORIES (Ordered Separately)

SP01-VISOR-B	Stadium Light Visor (Black)
SP01-LP	Laser Pen
SP01-SF-LG	Slip Fitter Mount (600W & 700W)



SP01-VISOR-B



SP01-LP