



NEW

landscape • entertainment • architectural • hospitality • illumination

AL-24 Series Area Light





AREA LIGHTS AL-24 SERIES



TYPE

SPECIFICATIONS

CONSTRUCTION: Spun copper 6" china hat with finial and 12" brass stanchion

LENS: Clear polysilicate glass tube

LED SUPPLIED: 50,000 hour 3w OMNI-3 Super Saver LED (-LED3SS)

LED OPTION: 50,000 hour 3w OMNI-3 LED (-LED3) or 50,000 hour 4w integrated round LED flat panel, warm white 3000K (-LEDP); optional cool white 5200K available (modify part number to "-LEDP52")

12V INTERNAL DRIVER FOR LED PANEL MODELS: 5w 12vDC 350mA output, 12vAC input

SOCKET FOR OMNI-3 LED MODELS: Single contact bayonet, brass nickel plated lamp socket screw shell (Ba15s)

SOCKET FOR LED PANEL MODELS: None - LED is hard wired inside fixture

WIRING: Black 3 foot 18/2 zip cord from base of fixture

For 25 foot 16/2 fixture lead wire add -25F to catalog number

CONNECTION: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only)


MOUNTING: FA-03 black 9" ABS stake, tapped 1/2" NPS

FINISH: Unfinished copper. Optional finishes available.



ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT
AL-24-LED3SS-COP	Copper 6" China Hat with brass stem	3w OMNI-3 SS LED	3.0 lbs.
AL-24-LED3-COP	Copper 6" China Hat with brass stem	3w OMNI-3 LED	3.0 lbs.
AL-24-LEDP-COP	Copper 6" China Hat with brass stem	4w LED Panel	3.0 lbs.

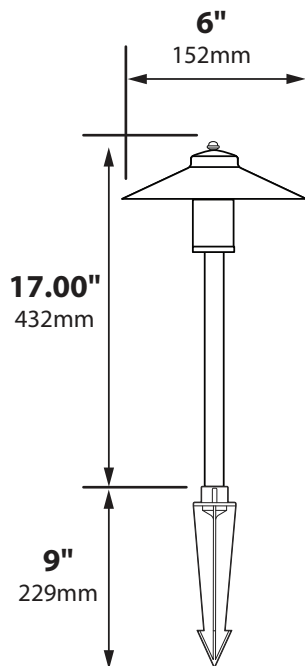

IP54

CE



JOB INFORMATION

Type:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	

FOCUS INDUSTRIES INC.
25301 COMMERCENTRE DRIVE
LAKE FOREST, CA 92630

www.focusindustries.com
sales@focusindustries.com
(949) 830-1350 • FAX (949) 830-3390


Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-BAR/CAR	-BAV/CAV	-BAT



AREA LIGHTS AL-24 SERIES

TYPE

LIGHT DISTRIBUTIONS AND PHOTOMETRICS

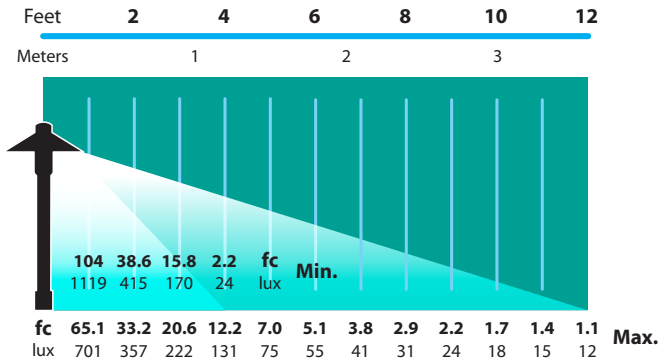

MOUNTING ACCESSORIES

