



Bright Light, Made to Last!



High CRI



Dimmable



Product information

FEATURES

- 4^{FT} 40w 5200LM
- High Lumen Efficacy 130LM/w
- DLC Premium, cETL listed
- LM-79 & LM-80 tested
- 0-10v dimmable
- 50,000 hour life
- Replaceable LED strip
- Cold rolled steel housing
- Aluminum heatsink
- Polycarbonate diffuse lens
- Isolated LED driver
- Quick & easy installation and maintenance
- No flicker, mercury free, instant on
- 5-year warranty

APPLICATION

- Hallways
- Walkways
- Storage areas
- Utility rooms
- Common areas


INSTALLATION

- Surface mount
- Suspended (optional clips)

ADDITIONAL INFO

- White housing
- Operating temperature -20°C ~+50°C
- Microwave sensor (optional)
- Emergency battery back up (optional)

DIAGRAM

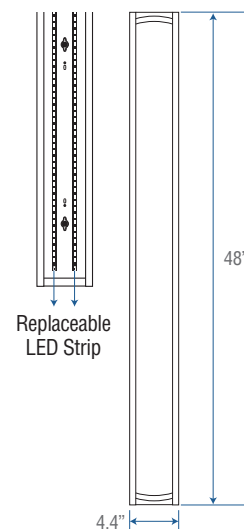

ORDER CODE	DLC MODEL	DLC ID	DESCRIPTION	WATTS	VOLT	LUMENS	CCT(K)	LIFE HRS	BEAM ANGLE	CRI	IP	MOL (IN)	CASE QTY.
L2401-2230	ILX-VSFD-220-D(4000K)	PLVTY3WFI4A	LED STRIP FIXTURE 4FT 40W 4K DIM	40	120-277V	5200	4000K	50,000	120°	83+	40	48"x4.4"x2.4"	8
L2401-2250	ILX-VSFD-220-D(5000K)	PLRPVVIKUZW	LED STRIP FIXTURE 4FT 40W 5K DIM	40	120-277V	5200	5000K	50,000	120°	83+	40	48"x4.4"x2.4"	8

Also available: 2FT, 4FT, 5FT. 3000K, 5000K and 6500K. White, Silver, Black. MOQ may required.

Exclusive Master Agent



Toronto | Calgary | Halifax

Tel: 1-905-264-1125 Toll Free: 1-800-361-7820 Fax: 1-905-264-1175

Email: information@interadwes.com | Website: www.interadwes.com

Head Office: 1-1 Keyes Court, Vaughan, ON L4H 4V6