RoHS Compliant






KT-LED115HID-V-EX39-840-D

HID REPLACEMENT LED LAMP

DESCRIPTION

115W HID Replacement LED Lamp | 4000K | >80 CRI | Vertical Light Direction

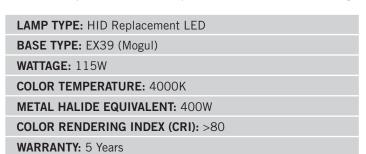



C(NT) US LISTED

PRODUCT FEATURES

- Replacement for Conventional Metal Halide Lamp
- Non-Dimmable; Do Not Dim
- 50,000+ Hour Lifetime
- Environmentally Friendly: No Mercury Used
- Instant Startup
- UL Listed
- Suitable for Use in Fully Enclosed Fixture
- Integral Driver, Eliminates the Need for External Driver or Ballast; Includes 6V Surge Protection
- Suitable for Use in Enclosed Fixtures
- Efficacy greater than 130 lm/W
- Listed on the DLC QPL
- IP20 Rated
- Operating Temperature: -29°C/-20°F to 60°C/140°F

OPERATING SPECIFICATIONS

ELECTRICAL CHARACTERISTICS

Input Voltage	Power Consumption	Power Factor	Input Current
120-277Vac	115W	>0.9	0.96A @ 120V 0.42A @ 277V


RATED LIFE

L70 (Hours)	50,000


PHOTOMETRIC CHARACTERISTICS

Color Temperature (CCT)	4000K
Luminous Flux	15100 lm
Color Rendering Index (CRI)	>80
Efficacy	131 lm/W
Visible Light Area	180°

SPECTRAL DISTRIBUTION



LUX DISTANCE CURVE



Note: The curves indicate the illuminated area and the average illumination when the luminaire is at a different distance.


Keystone Technologies • 1390 Welsh Road, North Wales, PA 19454 • Phone (800) 464-2680 • Fax (888) 966-0556 • www.keystonetech.com






KT-LED115HID-V-EX39-840-D

HID REPLACEMENT LED LAMP





EX39-based lamps will work in both E39 and EX39 sockets.

WIRING DIAGRAM

STEP 1


Disconnect power. Disconnect and remove existing ballast, capacitor, and/or ignitor (where applicable) from fixture.


STEP 2

Rewire for line voltage to the lamp socket.


STFP 3

Install new LED replacement lamp. Ensure lamp is operating properly when power is turned on.





PHYSICAL CHARACTERISTICS



LAMP DIMENSIONS

A (Body Length)	8.21"	
B (Diameter)	8.07"	

BASE TYPE: EX39 (Mogul)

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KT-LED115HID-V-EX39-840-D-DP	Distributor Pack (Individual Cartons)	TBD	Quick Ship

CATALOG NUMBER BREAKDOWN

