


Version	2.0	Date	8/17/23
Prepared By	JC		

PRODUCT SPECIFICATION			
Category	Slim Area Light		
Item Number	9622		
Stock Code	FXSAL75SW/8CCT3/WH/T3		
Mounting	Pole Mount/ Slip Fitter/ Yoke Mount/ Wall Mount		
Housing Color	White (RAL#9003)		
PICTURE			


ELECTRICAL CHARACTERISTICS			
Rated Wattage (W)	25 / 50 / 75	Replacement Wattage (W)	100-400
Tested Wattage (W)	-		
Input Voltage (V)	120-277		
Voltage Frequency (Hz)	50/60	Surge Protect Level	10KV
Input Current (A)	0.68	Dimmable	0-10V
Power Factor	>0.9	AUX (12V) Line	Yes
THD	<20%		

PHOTOMETRIC CHARACTERISTICS			
Lumen (lm)	3,500 / 7,000 / 10,555	CCT (K)	3CCT (30/40/50K)
Efficacy (lm/w)	140	Beam Angle (°)	Type 3
CRI	>80		

GENERAL CHARACTERISTICS	
Operating Temperature (°F)	- 40°F ~ 122°
Storage Temperature (°F)	- 40°F ~ 140°F
IP Rating	IP66
IK Rating	IK08
Rated Life (Hrs)	50,000
Warranty (Yrs)	7

ACCESSORIES		
Item #	Stock Code	Description
P10458	MT-AL/PM6/WH	6" Pole Mount Arm
P10460	MT-AL/SF/WH	Slip Fitter
P10474	MT-AL/WM/WH	Wall Mount
P10461	MT-SAL/YK12/WH	12" Yoke Mount

PRODUCT DIMENSIONS		
Width- in / (mm)	12.01"	307
Height- in / (mm)	2.60"	66
Depth- in / (mm)	14.20"	360
EPA (ft²)	0.212 ft² (@ 0 deg)	
Weight (lbs)	8	
Mounting Height (ft)	10~15	
Cable Length (ft)	1.64	

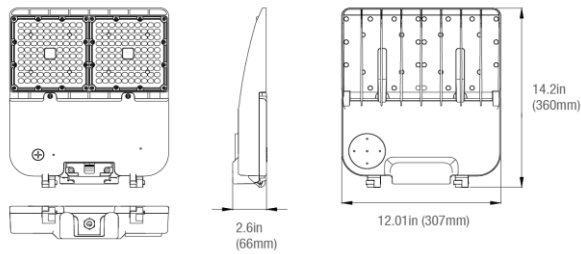

Technical drawings of the Slim Area Light showing front, side, and top views with dimensions:

- Front view: Shows the light fixture with a width of 12.01 in (307mm) and a height of 2.61 in (66mm).
- Side view: Shows the light fixture with a depth of 14.2 in (360mm).
- Top view: Shows the light fixture with a width of 12.01 in (307mm) and a height of 14.2 in (360mm).

CERTIFICATIONS			
UL/ETL	ETL/cETL	CEC	
NSF/ETL Sanitation		JA8	
Energy Star		FCC	✓
DLC	5.1 Premium	RoHS	✓

DOCUMENTS			
LM79	✓	IES File	✓
LM80	✓	Dimmer List	

COMMENTS