

## NREK4-850 / NREK-852 / NREK4-853

### 4' Rail Kit with (3) Cyndi LED Fixture

Source: 600lm / 8W, 1400lm / 20W or 2800lm / 32W LED

Type

Project

Catalog No.

Notes

#### PRODUCT DESCRIPTION

Rail kit comes complete and ready to install with mounting hardware and LED fixtures. Components includes: (1) 4' rail, (2) end caps, (1) 3" power stem with canopy, (2) 3" standoffs and (3) Cyndi LED fixtures. 120V Rail system allows Cyndi LED fixtures to be placed anywhere along the system where additional fixtures or components can be added at anytime

#### FEATURES

- Die-cast aluminum cylinder LED fixtures
- Cyndi LED fixtures available in 600lm, 1400lm or 2800lm
- Available in brushed nickel or bronze finish
- Standoffs and power stem can be placed anywhere along rail system
- Rail fixtures rotate 345° horizontally and 90° vertically
- Luminaires include field adjustable spot and narrow flood beam spreads (narrow flood installed)
- Dimmable
- Includes all necessary hardware
- Additional rails, fixtures or kits can be added at any time

#### SPECIFICATION

**Construction:** Main body constructed from one piece 0.07" die-cast aluminum.

**Stem:** 0.07" die-cast aluminum.

**Junction Box:** Prewired junction box includes quick connect to LED fixtures for ease of installation. Junction box includes two knockouts and snap on cover with 7" connector length.

**Mounting:** No housing is required, two tensions steel spring clips secure luminaire to ceiling. New construction frame-in kit is available, see accessories.

#### ELECTRICAL

**Input Voltage:** 120V

**Lumens / Wattage Per Head:** 600lm / 8W (NREK4-850), 1400lm / 20W (NREK4-852) or 2800lm / 32W (NREK4-853)

**Color Temperature:** 2700K (NREK4-850), 3000K or 4000K (NREK4-852 & NREK4-853)

**Color Rendering Index:** 80+ CRI (NREK4-850 & NREK4-852) or 90+ (NREK4-853)

**Beam Spread:** Spot (included) and Narrow Flood (installed)

**Dimming:** ELV

[Click Here](#) or check complete dimmer list at [www.NoraLighting.com](http://www.NoraLighting.com) in the "Compatibility" page under "Resources" tab.


#### LABELS AND LISTINGS

cULus Listed for Damp Locations

5-Year Limited Warranty




#### PRODUCT IMAGES AND DIMENSIONS

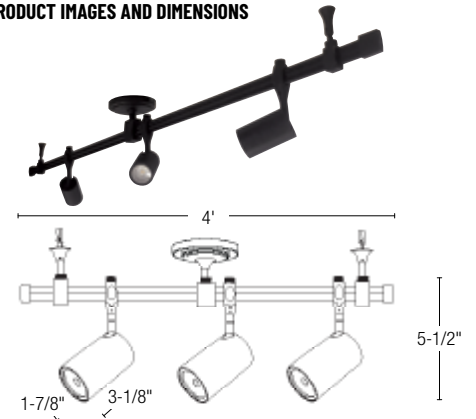


**NREK4-850**

4' Rail Kit with (3) 600lm Cyndi LED Fixtures

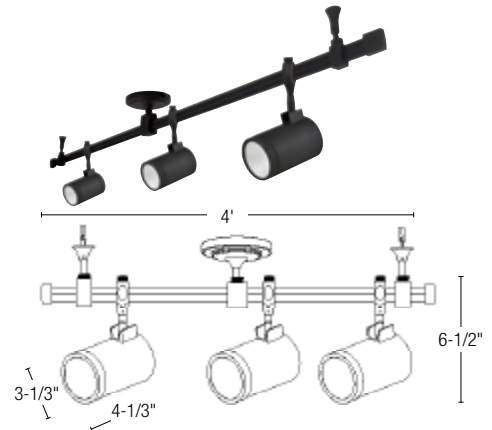

**NREK4-852**

4' Rail Kit with (3) 1400lm Cyndi LED Fixtures

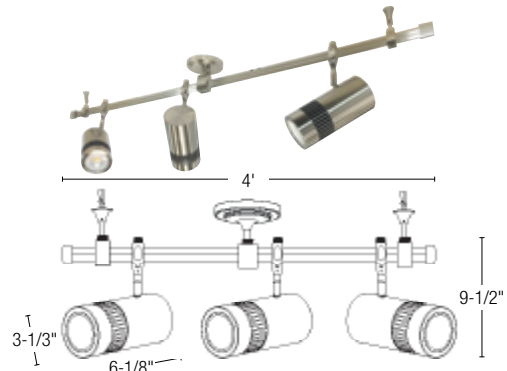

**NREK4-853**

4' Rail Kit with (3) 2800lm Cyndi LED Fixtures

### 4' Rail Kit with (3) Cyndi LED Fixtures

Catalog No.	Color Temperature	Beam Spread	Finish
<b>NREK4-850</b> = 4' Rail Kit with (3) 600lm Cyndi LED Fixtures	<b>27</b> = 2700K (NREK4-850 only)	<b>X</b> = Spot (included) and Narrow Flood (installed)	<b>BN</b> = Brushed Nickel
<b>NREK4-852</b> = 4' Rail Kit with (3) 1400lm Cyndi LED Fixtures	<b>30</b> = 3000K		<b>BZ</b> = Bronze
<b>NREK4-853</b> = 4' Rail Kit with (3) 2800lm Cyndi LED Fixtures	<b>40</b> = 4000K (NREK4-852 & 853 only)		

Example: **NREK4-85030XBN** = 4' Rail Kit with (3) 600lm Cyndi LED Fixtures, 3000K, Brushed Nickel finish