



FL4-SERIES AREA LIGHT



Project	
Date	
Prepared by	
Model #	FL4-1004T3-2

OVERVIEW

The FL4-Series Area Light represents our entry into specification grade exterior lighting. Finished in black, its sleek design and larger housing size provides an attractive look, especially when mounted on poles. Offering a wide range of mounting options, lumen packages, IES beam distribution patterns, and integrated controls, they will allow you to achieve any design requirement.

PRODUCT HIGHLIGHTS

- Interchangeable mounting options to adapt to any application: mounting arm, yoke, trunnion or slip fitter*
- Operates in -40°F/-40°C degree outdoor weather
- 1-10V dimming for maximum control and energy savings
- IP65 and Wet Location rated
- Black contemporary finish to complement all outdoor environments

*Fixture does not include mount. Mount must be ordered separately.



OPTICAL SPECIFICATIONS

Lumen Output (lm) ₁	14126 lm	Beam Angle (°) ₁	Type III (150°x85°)
CCT (K) ₁	4000K	Projected Lifetime (L ₇₀)	50,000 hrs
CRI (Ra) ₁	80	Chromaticity Shift	±250K
Efficacy (lm/W) ₁	135 lm/W		

ELECTRICAL SPECIFICATIONS

Power	100W	Replacement For	Up to 400W HID or HPS/MH
Apparent Power (VA)	102.5VA	Current Draw at 277V _{AC} (A) ₂	0.40A
System Wattage (W)	103.02W	Current Draw at 347V _{AC} (A) ₂	0.26A
Input Voltage	277-480VAC	Current Draw at 480V _{AC} (A) ₂	0.22
Output Voltage	56VDC		

PRODUCT DIMENSIONS

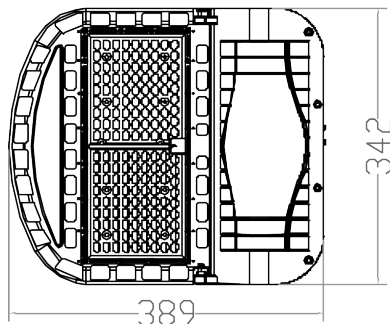

CONSTRUCTION

Housing Material	Aluminum Alloy	Installation Method	Wall Mounted/ Square Pole Mounted/ Round Pole Mounted
Housing Color	Black	Operation Range (°F/°C)	-40°F to 113°F/-40°C to 45°C
Lens Material	Polycarbonate	Weight (Kg/Lbs)	7.0kg / 14.43lbs
Dimensions (inch/mm)	25.2" x15.6" x 7" / 640mm x 395mm x 180mm	Warranty	10 Years


APPROVALS AND LISTINGS

DLC Premium	PMTGETGA	IP Rating	IP65
Wet Location Rated	Yes	EPA Rating	1.89 ft²
UL/ETL	cETLus	BUG Rating	B3-U3-G3

LED AND DRIVER SPECIFICATIONS

LED Type	3030	Surge Protection	L/N-PE: 10KV, L-N: 6KV
Dimmable	Yes (1-10V)	Inrush Current (A)	0A/55A
Power Factor	0.9	Driver Class	Class 2
THD	15%		

PHOTOMETRICS

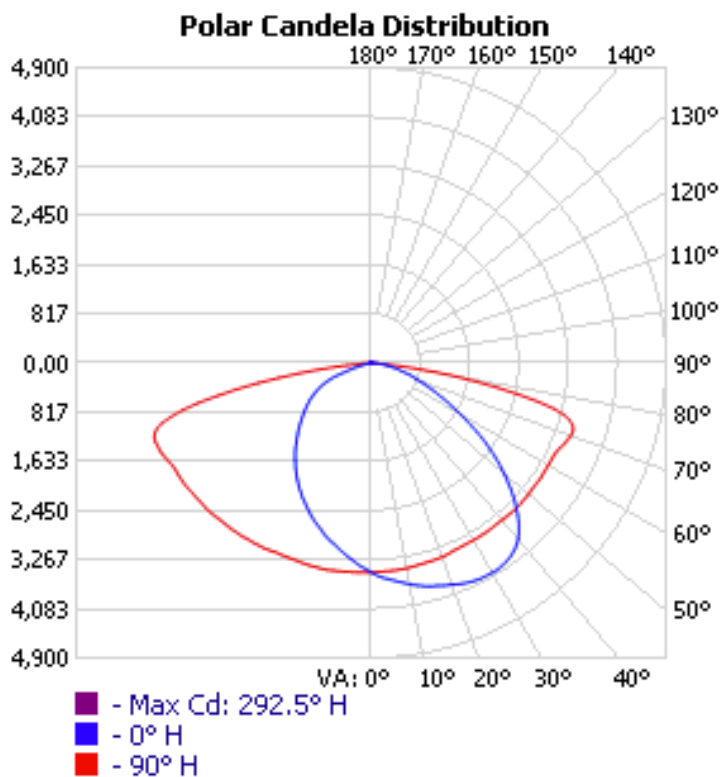

ZONAL LUMEN SUMMARY

ZONE	LUMENS	% LAMP	% LUMINAIRE
0-30	2,863.0	20.3%	20.3%
0-40	4,930.8	34.9%	34.9%
0-60	9,810.4	69.4%	69.5%
60-90	4,210.4	29.8%	29.8%
70-100	1,998.3	14.1%	14.1%
90-120	51.8	0.4%	0.4%
0-90	14,020.9	99.3%	99.3%
90-180	104.8	0.7%	0.7%
0-180	14,125.6	100%	100%

LCS TABLE

BUG RATING	B3 - U3 - G3
FORWARD LIGHT	LUMENS LUMENS %
LOW(0-30):	1,592.9 11.3%
MEDIUM(30-60):	4,295.3 30.4%
HIGH(60-80):	2,483.4 17.6%
VERY HIGH(80-90):	285.8 2%
BACK LIGHT	
LOW(0-30):	1,270.0 9%
MEDIUM(30-60):	2,653.4 18.8%
HIGH(60-80):	1,356.5 9.6%
VERY HIGH(80-90):	84.3 0.6%
UPLIGHT	
LOW(90-100):	18.5 0.1%
HIGH(100-180):	86.2 0.6%
TRAPPED LIGHT:	0.000 0%

ILLUMINANCE AT A DISTANCE

	CENTER BEAM	BEAM SPREAD(FT)	FIELD SPREAD(FT)		
HEIGHT(FT)	FOOTCANDLE	HORIZONTAL VERTICAL	HORIZONTAL VERTICAL		
4.00	217.24 FC	29.0 10.8	61.4 34.6		
8.00	54.31 FC	58.0 21.7	122.7 69.2		
12.00	24.14 FC	87.0 32.5	184.1 103.8		
16.00	13.58 FC	116.0 43.3	245.4 138.4		
20.00	8.69 FC	145.0 54.2	306.8 173.0		
		BEAM ANGLE	FIELD ANGLE		
		149.1° 107.1°	165.1° 154.0°		

MOUNTING OPTIONS



FL-MA4

Mounting Arm for FL4-Series
Area/Flood Lights

ACCESSORIES



FL-SHIELD14

Glare Shield for FL4-Series Area/
Flood Lights (80W/100/150W
models only)

PRODUCT KEY

FL4	-				-		-		Adders
Product Series			CCT		Voltage				
			<input type="checkbox"/> 4 - 4000K		<input type="checkbox"/> 1 - 100-277V <input type="checkbox"/> 2 - 277-480V				
		Wattage		LENS					
		<input type="checkbox"/> 80 <input type="checkbox"/> 100 <input type="checkbox"/> 150 <input type="checkbox"/> 200 <input type="checkbox"/> 240 <input type="checkbox"/> 300 <input type="checkbox"/> 450		<input type="checkbox"/> T3 - Type III Distribution <input type="checkbox"/> T4 - Type IV Distribution <input type="checkbox"/> T5 - Type V Distribution					

Example
FL4-2404T3-2-M6

FACTORY INSTALLED ADDERS

Motion Sensor Adders

☐ M6 Microwave Motion Sensor, Dimmable, 120-277V (80W-300W models)
☐ M7 Microwave Motion Sensor, Dimmable, 120-277V (450W model)

1. Due to the special conditions of manufacturing, the typical data of optical specifications can only reflect statistical figures and do not necessarily correspond to the actual parameters of each single product which could differ from the typical data.
2. Exceeding maximum ratings for input voltage and current will cause hazardous overload and will likely destroy the LED fixture.
3. Refer to Warranty Terms & Conditions available at premiseled.com/warranty