



# FL4-SERIES MULTI-MOUNT FLOOD LIGHT



Project	
Date	
Prepared by	
Model #	FL4-3104T5-1

## OVERVIEW

The FL4-Series Flood Light represents our entry into specification grade exterior lighting. Finished in black, its sleek design and larger housing size provides an attractive look, especially when mounted on poles. Offering a wide range of mounting options, lumen packages, IES beam distribution patterns, and integrated controls, they will allow you to achieve any design requirement.

## PRODUCT HIGHLIGHTS

- Interchangeable mounting options to adapt to any application: yoke, trunnion, slip fitter or mounting arm\*
- Operates in -40°F/-40°C degree outdoor weather
- 1-10V dimming for maximum control and energy savings
- IP65 and Wet Location rated
- Black contemporary finish to complement all outdoor environments
- Available with integrated motion sensor or photocell (optional)

\*Fixture does not include mount. Mount must be ordered separately.



## OPTICAL SPECIFICATIONS

Lumen Output (lm) <sub>1</sub>	40,323 lm	Beam Angle (°) <sub>1</sub>	Type V (125°x160°)
CCT (K) <sub>1</sub>	4000K	Projected Lifetime (L <sub>70</sub> )	50,000 hrs
CRI (Ra) <sub>1</sub>	80	Chromaticity Shift	±250K
Efficacy (lm/W) <sub>1</sub>	135 lm/W		

## ELECTRICAL SPECIFICATIONS

Power	300W	Replacement For	Up to 1000W HID or HPS/MH
Apparent Power (VA)	301.4VA	Current Draw at 120V <sub>AC</sub> (A) <sub>2</sub>	2.501A
System Wattage (W)	298.2W	Current Draw at 208V <sub>AC</sub> (A) <sub>2</sub>	1.431A
Input Voltage	100-277VAC	Current Draw at 240V <sub>AC</sub> (A) <sub>2</sub>	1.247A
Output Voltage	22-56V	Current Draw at 277V <sub>AC</sub> (A) <sub>2</sub>	1.091A

## PRODUCT DIMENSIONS

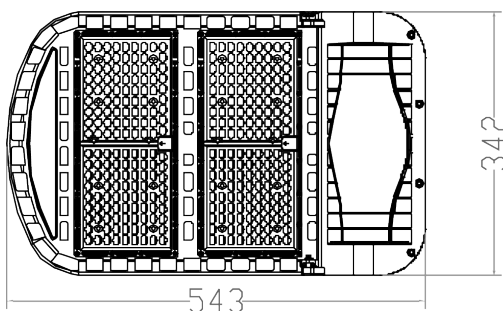

## CONSTRUCTION

Housing Material	Aluminum Alloy	Installation Method	Wall Mounted/ Square Pole Mounted/ Round Pole Mounted
Housing Color	Black	Operation Range (°F/°C)	-40°F to 113°F/-40°C to 45°C
Lens Material	Polycarbonate	Weight (Kg/Lbs)	9.9kg / 21.8lbs
Dimensions (inch/mm)	21.4" x13.5" x 4.5" / 543mm x 342mm x 115mm	Warranty	10 Years


## APPROVALS AND LISTINGS

DLC Premium	PL760U72	IP Rating	IP65
Wet Location Rated	Yes	EPA Rating	2.57ft²
UL/ETL	cETLus	BUG Rating	B5-U3-G4

## LED AND DRIVER SPECIFICATIONS

LED Type	3030	Surge Protection	L/N-PE: 10KV, L-N: 6KV
Dimmable	Yes, 0-10V	Inrush Current (A)	140A
Power Factor	0.9	Driver Class	Class P
THD	15%		

## PHOTOMETRICS

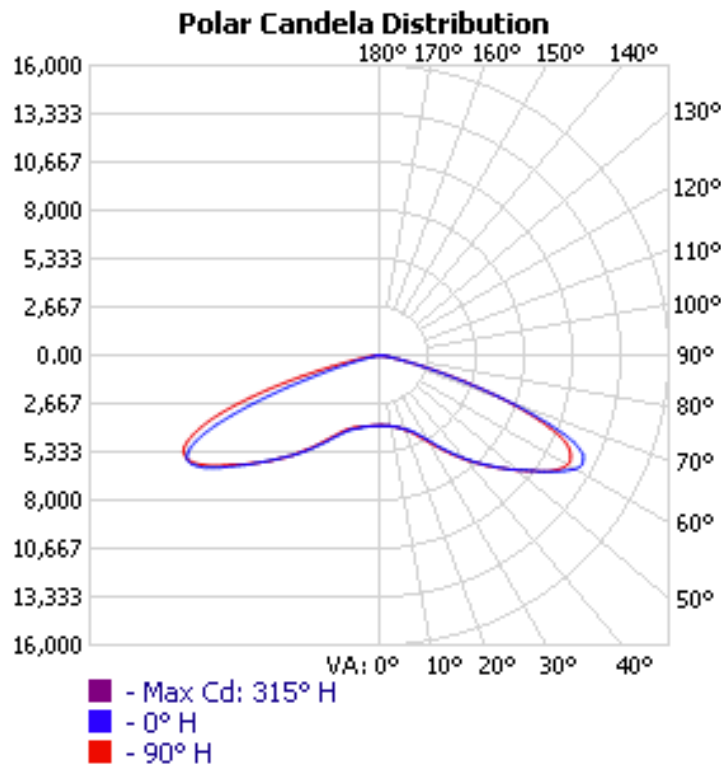

### ZONAL LUMEN SUMMARY

ZONE	LUMENS	% LAMP	% LUMINAIRE
0-30	3,765.9	8.7%	8.7%
0-40	7,672.2	17.7%	17.7%
0-60	23,419.3	54%	54%
60-90	19,723.1	45.5%	45.5%
70-100	7,706.3	17.8%	17.8%
90-120	108.8	0.3%	0.3%
0-90	43,142.4	99.6%	99.6%
90-180	192.9	0.4%	0.4%
0-180	43,335.4	100%	100%



### LCS TABLE

BUG RATING	B5 - U3 - G4
<b>FORWARD LIGHT</b>	LUMENS LUMENS %
LOW(0-30):	1,879.8 4.3%
MEDIUM(30-60):	9,895.5 22.8%
HIGH(60-80):	9,859.8 22.8%
VERY HIGH(80-90):	495.4 1.1%
<b>BACK LIGHT</b>	
LOW(0-30):	1,885.8 4.4%
MEDIUM(30-60):	9,760.0 22.5%
HIGH(60-80):	9,103.3 21%
VERY HIGH(80-90):	262.9 0.6%
<b>UPLIGHT</b>	
LOW(90-100):	39.1 0.1%
HIGH(100-180):	153.9 0.4%
<b>TRAPPED LIGHT:</b>	0.000 0%

### ILLUMINANCE AT A DISTANCE

	CENTER BEAM	BEAM SPREAD(FT)	FIELD SPREAD(FT)		
HEIGHT(FT)	FOOTCANDLE	HORIZONTAL VERTICAL	HORIZONTAL VERTICAL		
<b>4.00</b>	241.68 FC	12.0 28.2	20.7 53.1		
<b>8.00</b>	60.42 FC	23.9 56.3	41.4 106.1		
<b>12.00</b>	26.85 FC	35.9 84.5	62.1 159.2		
<b>16.00</b>	15.11 FC	47.9 112.6	82.7 212.2		
<b>20.00</b>	9.67 FC	59.9 140.8	103.4 265.3		
		BEAM ANGLE	FIELD ANGLE		
		112.5° 148.3°	137.7° 162.8°		

## MOUNTING OPTIONS

	<b>FL-MA4</b>	Mounting Arm for FL4-Series Area/Flood Lights		<b>FL-SF4</b>	Slip Fitter for FL4-Series Area/Flood Lights
	<b>FL-TR4</b>	Trunnion Mount for FL4-Series Area/Flood Lights		<b>FL-YK4</b>	Yoke Mount for FL4-Series Area/Flood Lights

## ACCESSORIES

	<b>PC1-TPT-1</b>	Stem Mount Swivel Photocell (Compatible with Mounting Arm or Slip Fitter option only)		<b>FL-SHIELD24</b>	Glare Shield for FL4-Series Area/Flood Lights (200W/240W/300W models only)
---	------------------	---	---	--------------------	--

## PRODUCT KEY

FL4

-

-

-

Adders

Product Series

CCT

Voltage

Wattage

LENS

☐ 4 - 4000K

☐ 1 - 100-277V  
☐ 2 - 277-480V

☐ 80  
☐ 100  
☐ 150  
☐ 200  
☐ 240  
☐ 300  
☐ 450

☐ T3 - Type III Distribution  
☐ T4 - Type IV Distribution  
☐ T5 - Type V Distribution

Example  
FL4-2404T3-1-M6P1

**FACTORY INSTALLED ADDERS**

**Motion Sensor Adders**

☐ M6 Microwave Motion Sensor, Dimmable, 120-277V (80W-300W models)  
☐ M7 Microwave Motion Sensor, Dimmable, 120-277V (450W model)

**Photocell Sensor Adders**

☐ P1 Stem Mount Photocell, 120V (Mounting Arm and Slip Fitter Only)

1. Due to the special conditions of manufacturing, the typical data of optical specifications can only reflect statistical figures and do not necessarily correspond to the actual parameters of each single product which could differ from the typical data.  
2. Exceeding maximum ratings for input voltage and current will cause hazardous overload and will likely destroy the LED fixture.  
3. Refer to Warranty Terms & Conditions available at [premiseled.com/warranty](http://premiseled.com/warranty)