

MAKO SERIES

LED VAPOR TIGHT FIXTURE



DESCRIPTION

Reno linear vapor tight is housed in polycarbonate silicon perimeter gasket with brackets for mounting. Engineered for powerful lighting. The Reno linear vapor tight has an IP65 protection grade and is DLC and UL certified, making it a great lighting solution for your industrial application.

APPLICATIONS

- Parking Area
- Stairwell
- Low Bay Application
- Utility Lighting

FEATURES

- Surface mount and suspension kit optional
- One-piece polycarbonate housing body and frosted polycarbonate lens
- DLC listed and UL listed
- All components have UL certification
- Protection Grade IP66
- Operating temperature: -22°F - 122°F
- Dual Voltage 120-347V
- Rated Life. > 70,000 hours
- 10-year Limited warranty
- 0-10V Dimming
- Selectable CCT and Wattage

SPECIFICATION

ORDER #	MODEL#	LUMENS OUTPUT	EFFICACY (lm/w)	WATTS	VOLTS	POWER FACTOR	CCT	CRI
R33110	RENO-LVP4-DV-MW-MCCT-R1(4FT)	3375/4725/6075	130	25/35/45W	120-347V	0.9	3500/4000/5000K	80
R33111	RENO-LVP4-DV-MW-MCCT-R2(4FT)	6500/7800/8580	130	50/60/66W	120-347V	0.9	3500/4000/5000K	80
R33108	RENO-LVP8-MW-DV-MCCT (8FT)	8100/10800/13550	130	60/80/100W	120-347V	0.9	3500/4000/5000K	80



Date:



Type:

Project Name:



Part Number:

DIMENSION

4 FT

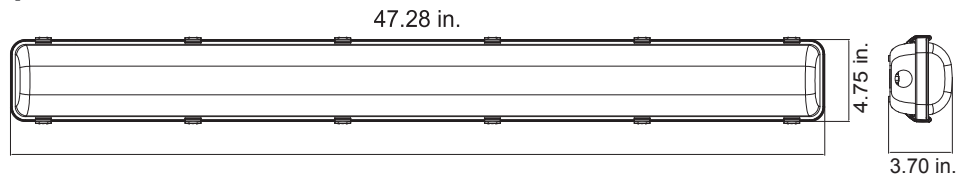

8 FT

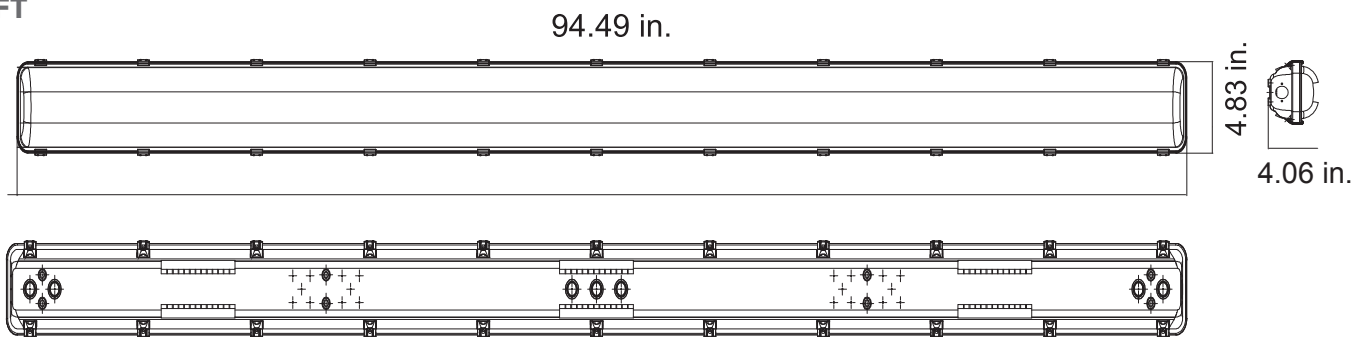

905-604-4666



info@renolighting.com



www.renolighting.com

Date:


Type:

Project Name:


Part Number:

LUMINOUS EMITTANCE


25W

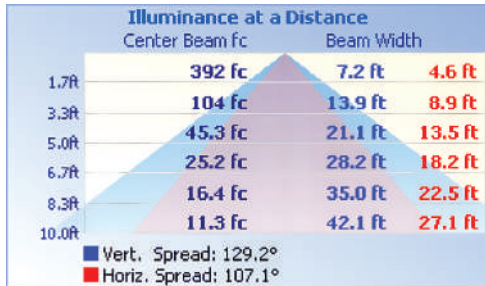


35W

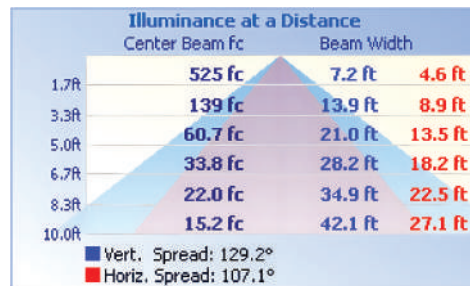


45W

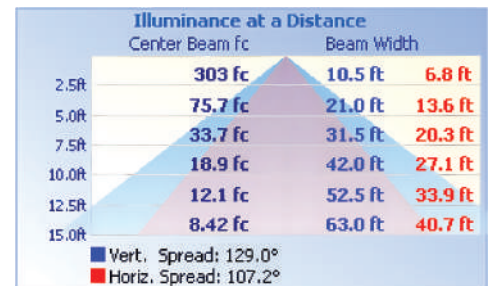

50W

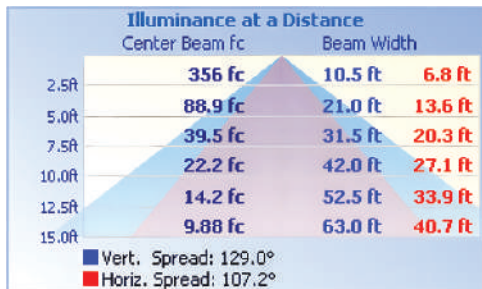

60W

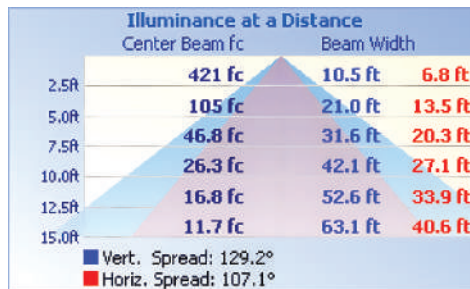

66W

